

APP CRS
309°

Rwy Ldg
TDZE
Apt Elev

4499
1715
1723

RNAV (GPS) RWY 31

CHAUTAUQUA COUNTY/JAMESTOWN (JHW)

RNP APCH-GPS


▼

NA

Rwy 31 Straight-in/Circling and Circling to Rwy 13 NA at night.
When local altimeter setting not received, use Dunkirk altimeter setting:
increase all MDAs 200 feet and visibility LNAV Cats C/D ¾ SM, Circling Cat C ½ SM
and Circling Cat D ¾ SM. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb
to 4000 direct CRYST WP
and hold.

AWOS-3PT 118.425	BUFFALO APP CON ★ 126.05	UNICOM 122.975 (CTAF) 0
---------------------	-----------------------------	----------------------------

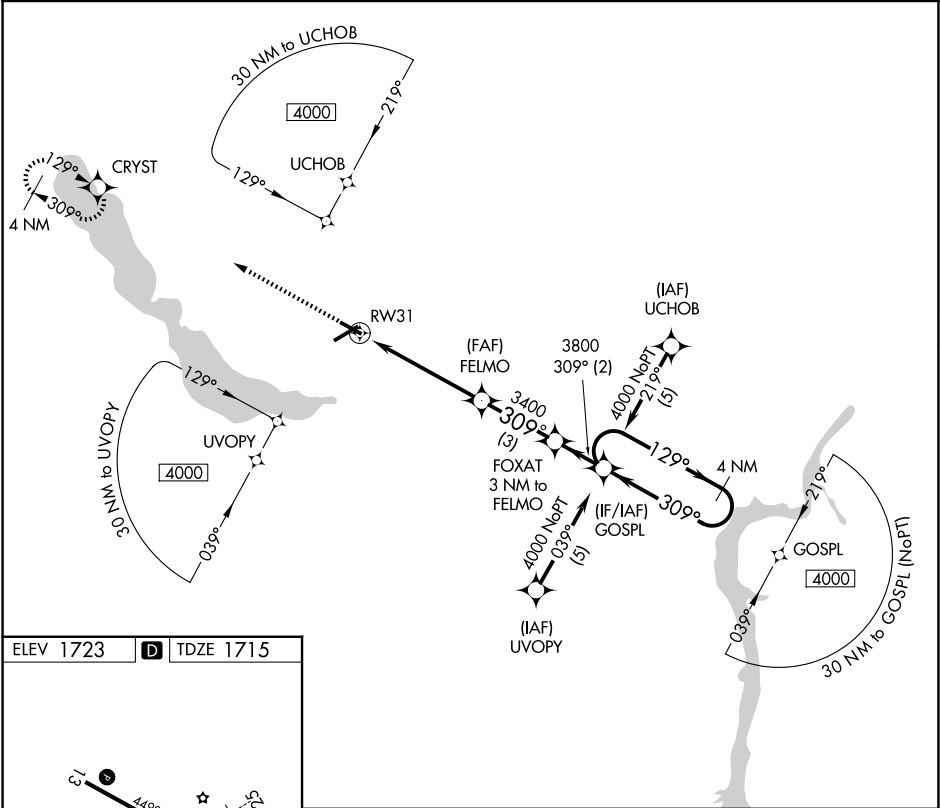

ELEV 1723

D

TDZE 1715

4000

CRYST

FOXAT 3 NM to FELMO

GOSPL

4 NM Holding Pattern

RW31

FELMO

3400

3800

129°

309°

4000

5 NM

3 NM

2 NM

CATEGORY	A	B	C	D
LNAV MDA	2200-1	485 (500-1)	2200-1¼ 485 (500-1¼)	2200-1½ 485 (500-1½)
CIRCLING	2200-1	477 (500-1)	2260-1½ 537 (600-1½)	2340-2 617 (700-2)

REIL Rwy 31 0
MIRL Rwy 13-31 0
HIRL Rwy 7-25 0

NE-2, 27 NOV 2025 to 25 DEC 2025

NE-2, 27 NOV 2025 to 25 DEC 2025