

LOC/DME I-CLL
110.55
Chan **42(Y)**

APP CRS
346°

Rwy Ldg
TDZE
Apt Elev
6932
311
321

ILS or LOC RWY 35
EASTERWOOD FLD (CLL)

ADF or DME required for procedure entry. ADF or DME required for LOC only.

▼

▲

For inop ALS, increase S-ILS 35 Cat E visibility to ¾ SM and S-LOC 35 Cat E visibility to 1¾ SM. ILS glideslope unusable for coupled approaches below 1050 feet MSL.

MALSR
65

MISSED APPROACH: Climb to 2500 on I-CLL north course to DERRS INT/I-CLL 11.5 DME and hold.


ATIS
126.85

HOUSTON APP CON
134.3 360.85

EASTERWOOD TOWER ★
118.5 (CTAF) 0 284.7

GND CON
128.7 284.7

UNICOM
122.95

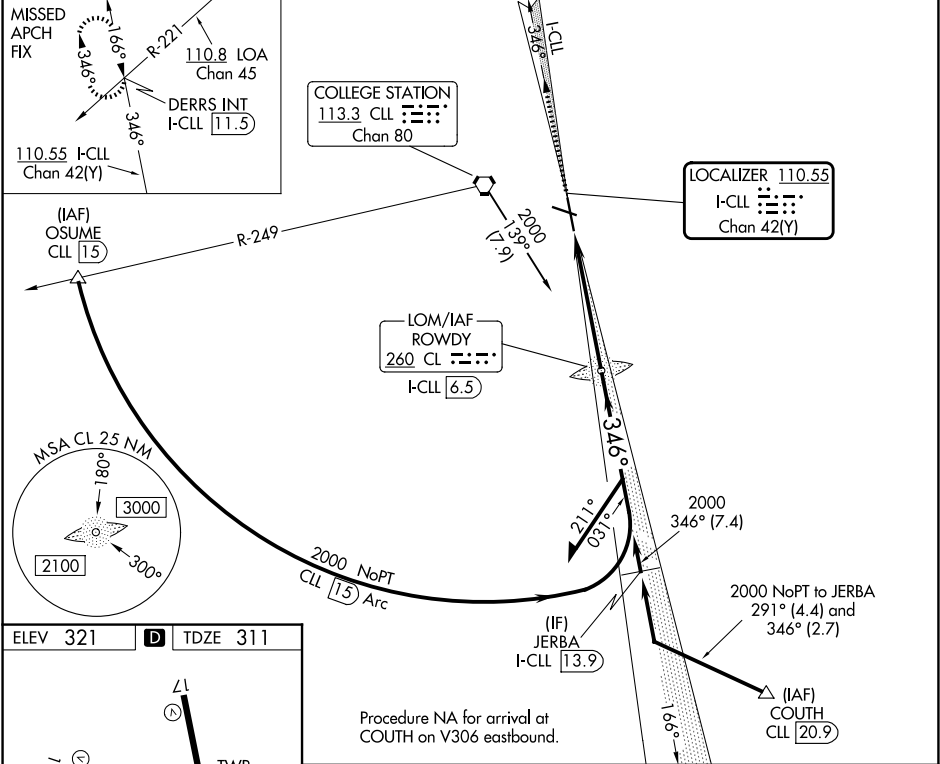

ELEV **321** | **D** | TDZE **311**

LI

11

5158 X 1.50

7000 X 1.46

35

346°

TWR

REIL Rwy 29

MIRL Rwy 11-29

HIRL Rwy 17-35

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

2500

I-CLL N crs

DERRS INT

CL LOM ROWDY I-CLL 6.5

Remain within 15 NM

1968

176°

2000

346°

2000

GS 2.90°

TCH 57

Use I-CLL DME when on the localizer course.

CATEGORY	A	B	C	D	E
S-ILS 35	511-1½ 200 (200-½)				
S-LOC 35	760-½ 449 (500-½) 760-⅞ 449 (500-⅞)				
CIRCLING	860-1 539 (600-1)	880-1 559 (600-1)	1000-2 679 (700-2)	1180-2¾ 859 (900-2¾)	1180-3 859 (900-3)

SC-5, 27 NOV 2025 to 25 DEC 2025

SC-5, 27 NOV 2025 to 25 DEC 2025