

WAAS CH 82416 W05A	APP CRS 046°	Rwy Ldg TDZE Apt Elev	5320 16 17
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 5

SOUTHWEST OREGON RGNL (OTH)

RNP APCH.

▼


▲

Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. For inop ALS, increase LPV all Cats visibility to ½ SM, LNAV/VNAV all Cats visibility to 1½ SM, and increase LNAV Cat C/D visibility to 1¾ SM.

MAISR

MISSED APPROACH: Climb to 6000 direct RUNUE and on track 015° to RARES and hold, continue climb-in-hold to 6000.

AWOS-3PT 135.075	SEATTLE CENTER 127.55 254.35	NORTH BEND TOWER* 118.45 (CTAF) 0	GND CON 127.1
----------------------------	--	---	-------------------------

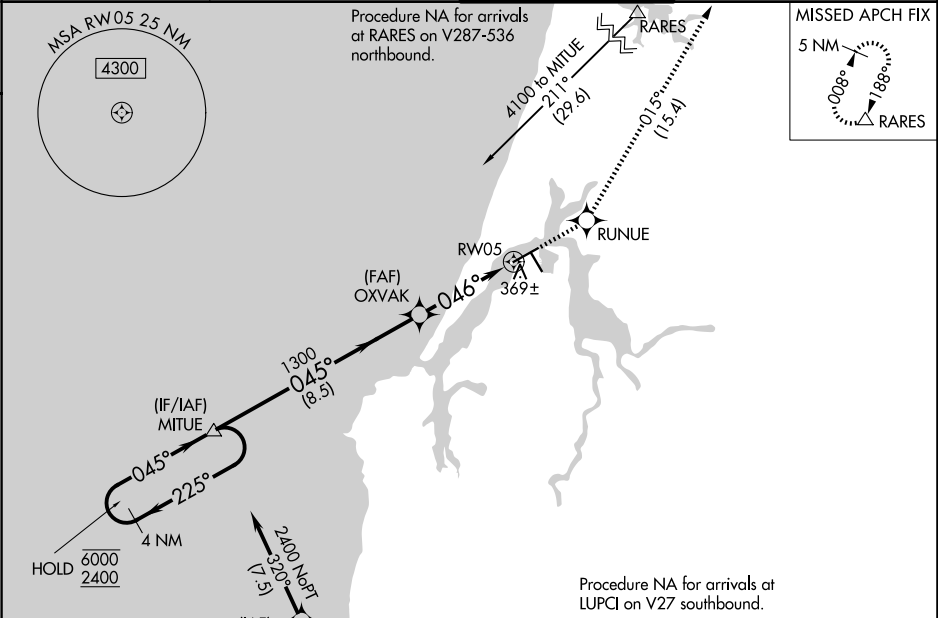

4 NM Holding Pattern		MITUE		6000 RUNUE		RARES	
6000 ← 225°		2400 → 045°		1300		tr 015°	
GP 3.00°		TCH 51		*1.7 NM to RWY 5		*LNAV only	
8.5 NM		2.2 NM		1.7 NM			
CATEGORY		A		B		C	
LPV DA		319-1½		303 (400-½)			
LNAV/VNAV DA		550-1¾		534 (600-1¾)			
LNAV MDA		620-½		604 (700-½)		620-1¾ 604 (700-1¾)	
CIRCLING		680-1 663 (700-1)		820-1 803 (900-1)		1100-3 1083 (1100-3) 1160-3 1143 (1200-3)	

ELEV 17

TDZE 16

5980 X 150

4420 X 150

TWR

046°

31

HIRL Rwy 5-23

MIRL Rwy 13-31

REIL Rwys 13, 23 and 31

NW-1, 27 NOV 2025 to 25 DEC 2025

NW-1, 27 NOV 2025 to 25 DEC 2025