

LOC/DME I-ROF
111.15
Chan **48(Y)**

APP CRS
328°

Rwy Ldg
TDZE **705**
Apt Elev **712**

LOC RWY 33
AURORA MUNI (ARR)

⚠

For inop ALS, increase S-LOC 33 Cats C and D visibility to 1¼ SM and EPABE FIX minimums S-LOC 33 Cats C and D visibility to 1 SM.

MALSR


MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 on heading 146° and JOT VOR/DME R-347 to VAINS INT/JOT 13 DME and hold, continue climb-in-hold to 3000.

ATIS
125.85

CHICAGO APP CON
133.5 349.0

AURORA TOWER★
120.6 (CTAF) 0

GND CON
121.7

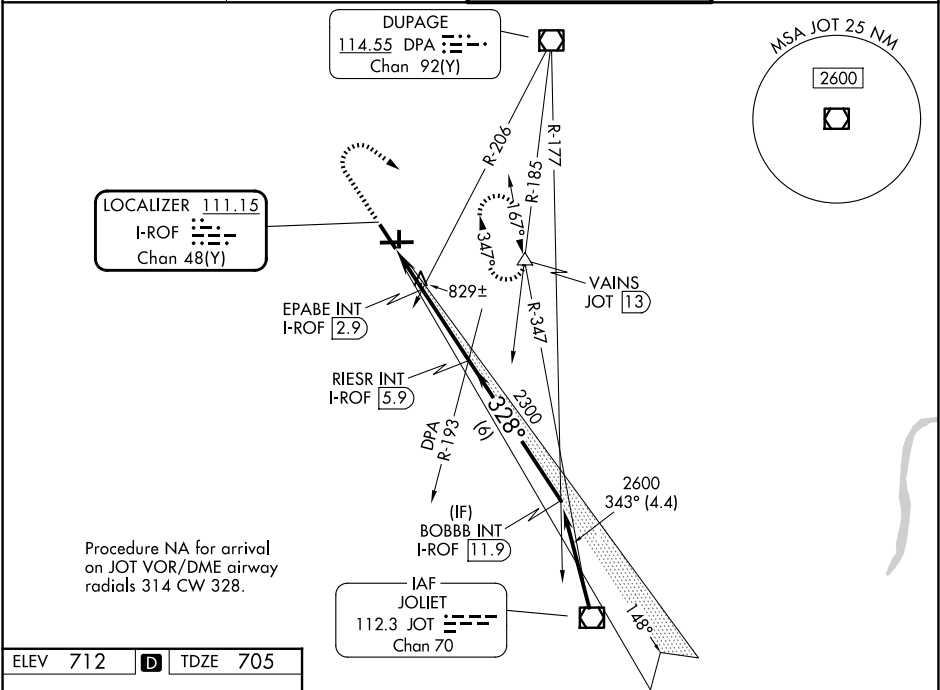

Procedure NA for arrival on JOT VOR/DME airway radials 314 CW 328.

ELEV 712 D TDZE 705

HIRL Rws 15-33 and 9-27
MIRL Rws 18-36
REIL Rws 15, 18, 27, and 36

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

	1400	3000	JOT R-347	VAINS				
			hdg 146°	△				
					RIESR INT I-ROF 5.9		BOBBB INT I-ROF 11.9	
								2600
					EPABE INT I-ROF 2.9			
					I-ROF 1.1	I-ROF 2.1		
								1320
								2300
								328°
								3.04° TCH 48
								1 NM 0.8 NM 3 NM 6 NM
CATEGORY	A	B	C	D				
S-LOC 33	1320-½ 615 (700-½)		1320-⅜ 615 (700-⅜)					
CIRCLING	1320-1 608 (700-1)		1320-⅜ 608 (700-⅜)	1320-2 608 (700-2)				
EPABE FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)								
S-LOC 33	1080-½ 375 (400-½)		1080-⅝ 375 (400-⅝)					
CIRCLING	1200-1 488 (500-1)		1300-1½ 588 (600-1½)	1320-2 608 (700-2)				

EC-3, 27 NOV 2025 to 25 DEC 2025

EC-3, 27 NOV 2025 to 25 DEC 2025