

WAAS CH 78239 W09A	APP CRS 092°	Rwy Idg TDZE Apt Elev	5001 631 631
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 9

GREENWOOD COUNTY (GRD)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Laurens altimeter setting. DME/DME RNP-0.3 NA. Circling Rwy 5, 23 NA at night. When local altimeter setting not received, use Laurens altimeter setting and increase LPV DA to 991 feet and visibility 1⁄8 SM all Cats, LNAV/VNAV DA to 1070 feet and visibility 1⁄4 SM all Cats, increase all MDA 60 feet, and LNAV Cat C/D visibility 1⁄8 SM and Circling Cat C/D visibility 1⁄4 SM. Rwy 9 helicopter visibility reduction below 3⁄4 SM NA.

MISSED APPROACH:
Climb to 2500 direct COBOT and hold.

ASOS 121.125	GREER APP CON★ 120.6 350.2	UNICOM 122.975 (CTAF) 0
------------------------	--------------------------------------	-----------------------------------

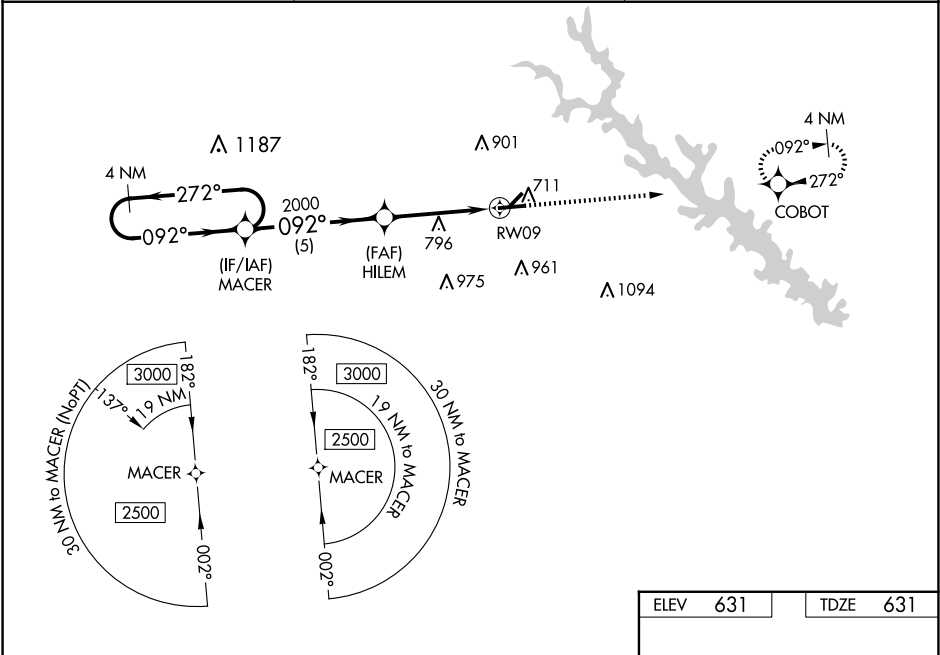

4 NM Holding Pattern		MACER		HILEM		RW09	
2500		2000		2000		2000	
GP 3.00°		5 NM		3 NM		1.2 NM	
TCH 55		A		B		C	
CATEGORY		A		B		C	
LPV DA		938-1		307 (400-1)			
LNAV/VNAV DA		1017-1¼		386 (400-1¼)			
LNAV MDA		1060-1		429 (500-1)		1060-1¼ 429 (500-1¼)	
CIRCLING		1080-1		1100-1		1320-2	
		449 (500-1)		469 (500-1)		689 (700-2)	
						1340-2¼	
						709 (800-2¼)	

