

LOC/DME I-MKZ	APP CRS	Rwy Ldg	7R	7L
109.9	071°	11095	11259	
Chan 36		TDZE	128	128
		Apt Elev	128	128

ILS or LOC RWY 7R
LOS ANGELES INTL (LAX)


Simultaneous approach authorized. DME or RADAR required.
Inop table does not apply to Sidestep Rwy 7L Cats A and B.
RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR Rwy 7R

MALSR Rwy 7L

MISSED APPROACH: Climb to 3000 on LAX VORTAC R-068 to DOWNE INT/ LAX 15.5 DME/RADAR and hold.

D-ATIS	SOCAL APP CON	LOS ANGELES TOWER	GND CON
133.8	124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	133.9 239.3 (N) 120.95 379.1 (S)	121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)

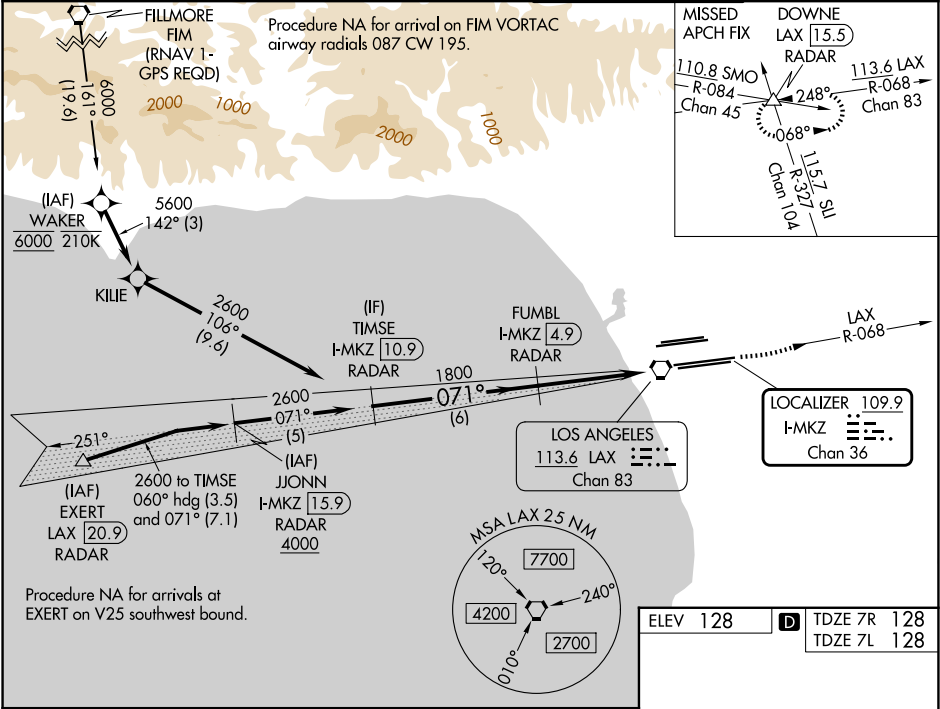

TIMESE I-MKZ 10.9 RADAR	FUMBL I-MKZ 4.9 RADAR	LAX R-068	DOWNE
2600	1800	3000	
GS 3.00° TCH 60	1800	I-MKZ DME ANTENNA	
6 NM	4.2 NM	0.9 NM	
CATEGORY	A	B	C
S-ILS 7R#	328/24	200 (200-½)	
S-LOC 7R	460/24	332 (400-½)	460/26 332 (400-½)
SIDESTEP 7L	520/55	392 (400-1)	520-1½ 392 (400-1½)

TDZ/CL Rwy 6R, 7L, 24R, and 25L
HIRL all Rwy

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

SW-3, 25 DEC 2025 to 22 JAN 2026

SW-3, 25 DEC 2025 to 22 JAN 2026