

PATUXENT RIVER, MARYLAND

RNAV (GPS) RWY 14



WAAS CH 87821 W14A	APCH CRS 136°	Rwy ldg TDZE 27 Arpt Elev 39
--------------------------	------------------	------------------------------------

(USN) PATUXENT RIVER NAS (TRAPNELL FLD) (KNHK)


RNP APCH-GPS	MISSED APPROACH: Climb to 600, then climbing left turn to 2500 direct SPRIG and hold.
RADAR required	

ATIS 322.425	APP CON/DEP CON* 121.0 250.3	TOWER 123.7 343.65	GND CON 120.6 336.4	CLNC DEL 135.2 316.125	ASR/PAR
-----------------	---------------------------------	-----------------------	------------------------	---------------------------	---------

For uncompensated Baro-VNAV systems, Procedure NA below -15°C (5°F) or above 54°C (129°F).

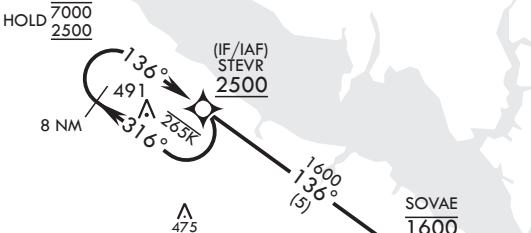

CAUTION: High volume VFR traffic in vicinity of KOSSE during VMC.



EMERG SAFE ALT 100 NM 5200

8 NM Holding Pattern		600	2500	SPRIG	ELEV 39	TDZE 27
GP 3.00° TCH 50						
CATEGORY	A	B	C	D	E	
LPV DA	227-¾		200	(200-¾)		
LNAV/VNAV DA	379-1 352 (400-1)	390-1 363 (400-1)	398-1 371 (400-1)	409-1½ 382 (400-1½)		
LNAV MDA	500-1 481 (500-1)	473 (500-1)	500-1½ 581 (600-1½)	473 (500-1½)		
CIRCLING	520-1 481 (500-1)	560-1 521 (600-1)	620-1½ 581 (600-1½)	700-2 661 (700-2)	820-2¾ 781 (800-2¾)	
PATUXENT RIVER, MARYLAND		38°17'N - 76°25'W PATUXENT RIVER NAS (TRAPNELL FLD) (KNHK)				
Amtdr 4 07AUG25		RNAV (GPS) RWY 14				

HIRL Rwy 6-24 and 14-32
TDZL/CL Rwy 6