

LOC I-SLN <u>108.9</u>	APP CRS 353°	Rwy Ldg 12300 TDZE 1271 Apt Elev 1288
----------------------------------	------------------------	--


ILS or LOC RWY 35
SALINA RGNL (SLN)

T For inop ALS, increase S-LOC 35 Cat D visibility to 1¼ SM and Cat E visibility to 1½ SM. For inop ALS, increase S-ILS 35 Cat E visibility to ¾ SM. Circling NA for Cats D and E southwest of Rwy 12-30.




MISSED APPROACH: Climb to 1700 then climb to 3000 direct SLN VORTAC and hold.

ATIS 120.15	KANSAS CITY CENTER 134.9 363.2	SALINA TOWER ★ 119.3 (CTAF) 0 257.7	GND CON 121.9 360.8	UNICOM 122.95
----------------	-----------------------------------	--	------------------------	------------------

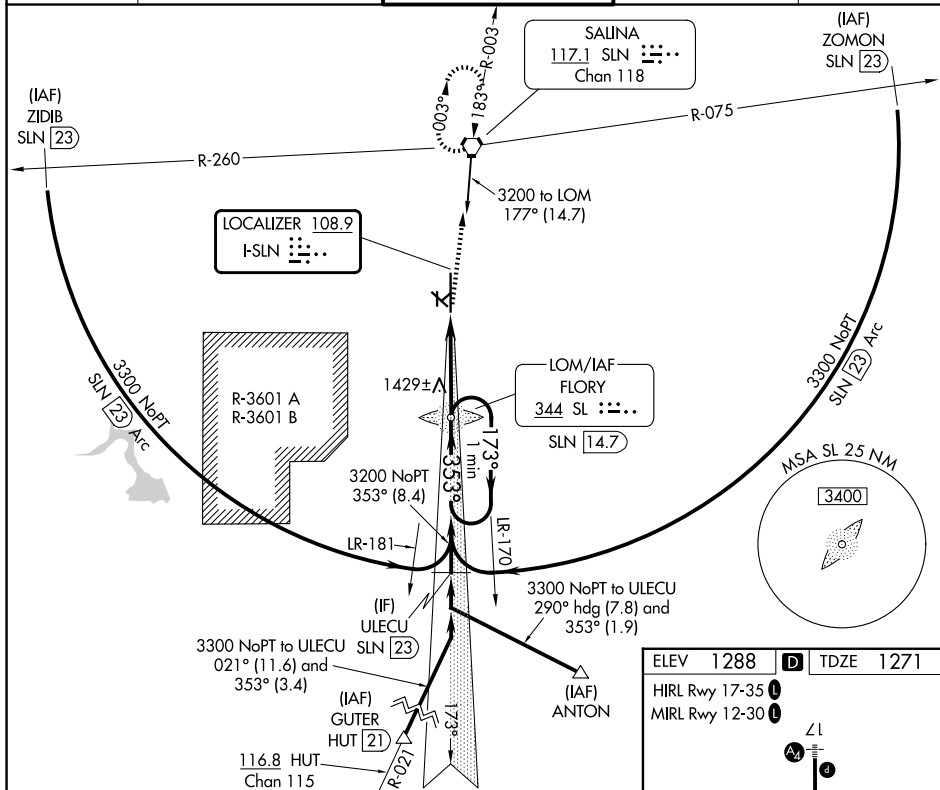

CATEGORY	A	B	C	D	E
S-ILS 35	1471-1/2 200 (200-1/2)				
S-LOC 35	1680-1/2 409 (400-1/2)				
CIRCLING	1820-1 532 (600-1)	1840-1 552 (600-1)	1860-1 1/2 572 (600-1 1/2)	1860-2 572 (600-2)	1920-2 1/4 632 (700-2 1/4)

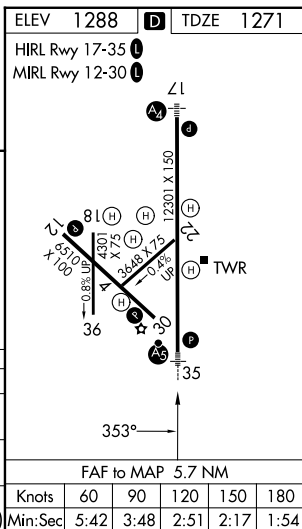

ILS or LOC RWY 35