

VOR/DME ALW
116.4
Chan **111**

APP CRS
021°

Rwy Ldg **6527**
TDZE **1175**
Apt Elev **1194**

VOR RWY 2
WALLA WALLA RGNL (ALW)

DME required.


▼

▲

Rwy 2 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing left turn to 4900 on ALW
VOR/DME R-201 within 10 DME then right turn direct ALW
VOR/DME and hold, continue climb-in-hold to 4900.

ASOS 135.875	SPOKANE APP CON★ 133.15 379.15	WALLA WALLA TOWER★ 118.5 (CTAF) 0 289.4	GND CON 121.6 289.4	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

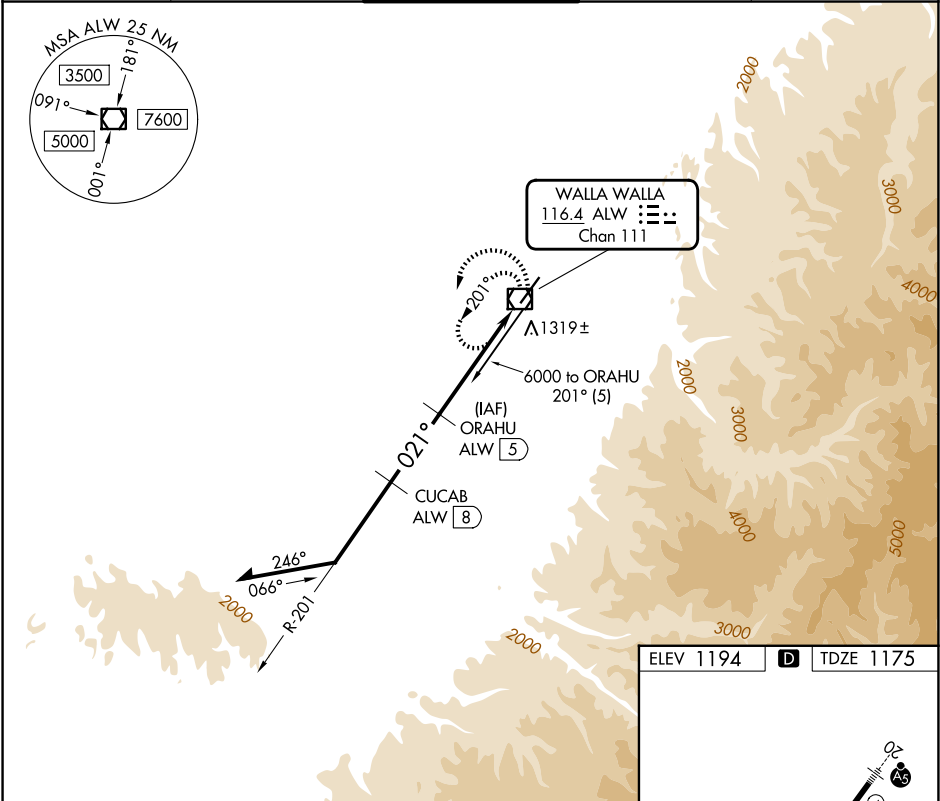

Remain within 10 NM

ORAHU ALW 5

4900

ALW R-201

ALW 1.3

ALW VOR/DME

ALW

4800

021°

3500

2800

3.05° TCH 45

3 NM

3.8 NM

1.2

CATEGORY	A	B	C	D
S-2	1580-1	405 (400-1)	1580-1⅛	405 (400-1⅛)
CIRCLING	1760-1 566 (600-1)	1820-1 626 (700-1)	2120-2¾ 926 (1000-2¾)	2300-3 1106 (1200-3)

ELEV 1194 D TDZE 1175

0.6% UP

6527 N 150

TWR

021°

REIL Rwy 2 0
HIRL Rwy 2-20 0