

LOC I-HWM
110.7

APP CRS
044°

Rwy Ldg **10701**
TDZE **1057**
Apt Elev **1077**

ILS or LOC RWY 4L
WILMINGTON AIR PARK (ILN)

RNP APCH - GPS.

▼


▲

For inop ALS, increase S-LOC 4L Cats C and D visibility to 1½ SM.

MALSRL

MISSED APPROACH: Climb to 3000 direct WIZRD and hold.

D-ATIS 124.925	COLUMBUS APP CON 118.85 269.275	WILMINGTON TOWER 119.475	GND CON 121.6
--------------------------	---	------------------------------------	-------------------------

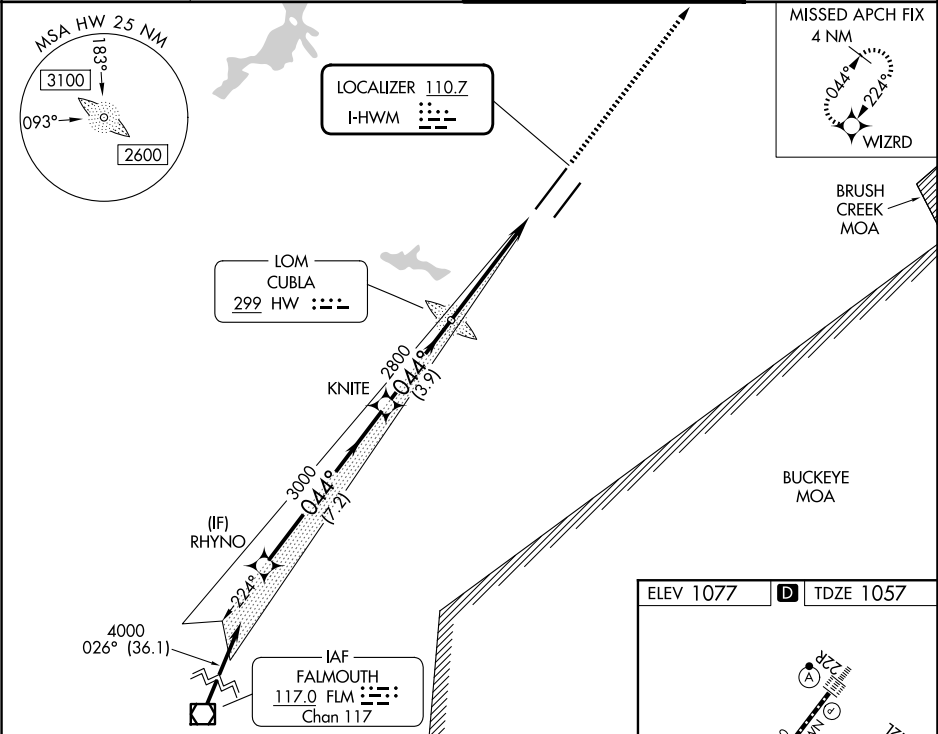

RHYNO

KNITE

HW LOM CUBLA

4000

3000

2701

2800

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 62).

3000

WIZRD

GS 3.00°
TCH 50

7.2 NM

3.9 NM

5 NM

CATEGORY	A	B	C	D
S-ILS 4L	1257/24 200 (200-½)			
S-LOC 4L	1520/24 463 (500-½)		1520/50 463 (500-1)	
CIRCLING	1560-1 483 (500-1)		1860-2¼ 783 (800-2¼)	1860-2½ 783 (800-2½)

ELEV 1077

TDZE 1057

22R

22L

4L

4R

TWR

TDZ/CL Rwy 22L and 22R
HIRL Rwy 4L-22R and 4R-22L

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40