


LOC/DME I-URN 111.9 Chan 56	APP CRS 096°	Rwy Ldg 11640 TDZE 883 Apt Elev 896	ILS or LOC RWY 9
---	------------------------	--	------------------

RNP APCH - GPS from ACHOO or AIREE or BAGGE or CALFS or CINSI or FLOTT or IDULE.
DME or RADAR required. RADAR required for procedure entry at JADOP.

MALSR

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct FLM VOR/DME and hold.

D-ATIS 134.375	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	GND CON 121.7
--------------------------	--	---	-------------------------

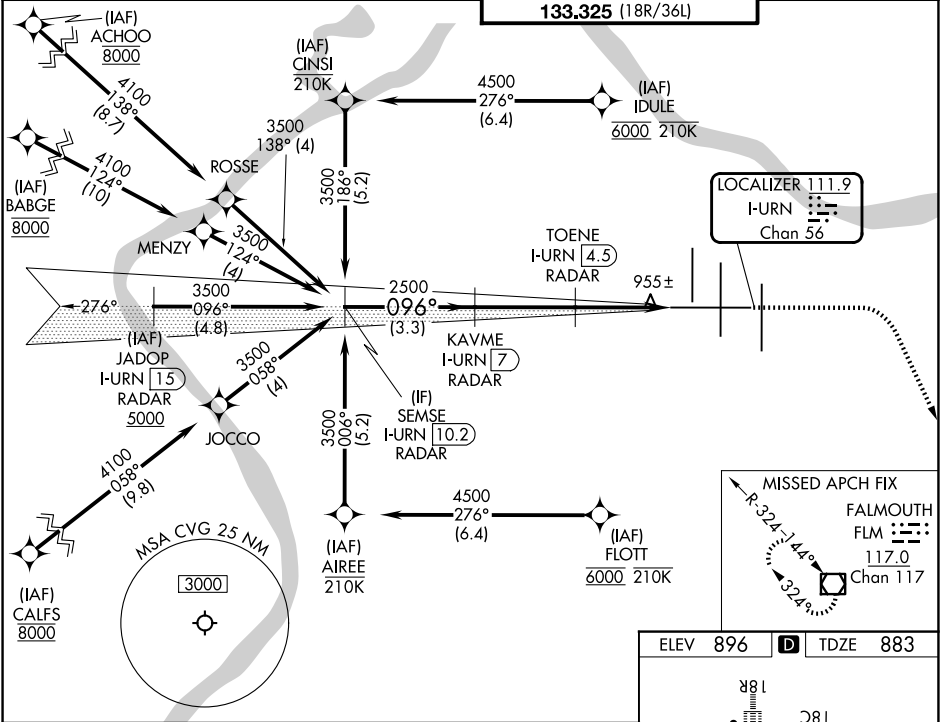

VGSI and ILS glidepath not coincident (VGSI Angle 3.00°/TCH 70).					ELEV 896		D		TDZE 883	
					2000		3000		FLM	
CATEGORY					A		B		C	
S-ILS 9					1083/18		200 (200-½)			
S-LOC 9					1220/24		337 (400-½)		1220/26 337 (400-½)	
CIRCLING					1460-1		564 (600-1)		1560-1¾ 664 (700-1¾) 1560-2 664 (700-2)	
									HRTL all Rwy's TDZ/CL all Rwy's except 27	
									FAF to MAP 4.9 NM	
					Knots		60		90 120 150 180	
					Min:Seq		4:54		3:16 2:27 1:58 1:38	