

LOC I-FTY <u>109.1</u>	APP CRS 085°	Rwy Ldg TDZE Apt Elev	5797 808 841
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 8

FULTON COUNTY EXEC/CHARLIE BROWN FLD (FTY)

RADAR required to define TALDE.
RADAR required for procedure entry.


T Circling Rwy 14, 32 NA at night. Rwy 8 helicopter visibility reduction below $\frac{3}{4}$ SM NA.
A For inop ALS, increase S-LOC 8 Cat A visibility to 1 SM, Cat C/D visibility to 2 $\frac{1}{2}$ SM.
 Ridge with trees to 1299' MSL between FAF and runway threshold may be obscured by clouds even with airfield ceiling at or above procedure minimums.

MALSR



MISSED APPROACH: Climb to 1800 then climbing left turn to 4000 on heading 290° and RMG R-132 to DALAS INT/ RMG VORTAC 18.5 DME and hold.

ATIS 120.175	ATLANTA APP CON 121.0 268.7	FULTON COUNTY TOWER 118.45 257.8	GND CON 121.7 348.6
------------------------	---------------------------------------	--	-------------------------------

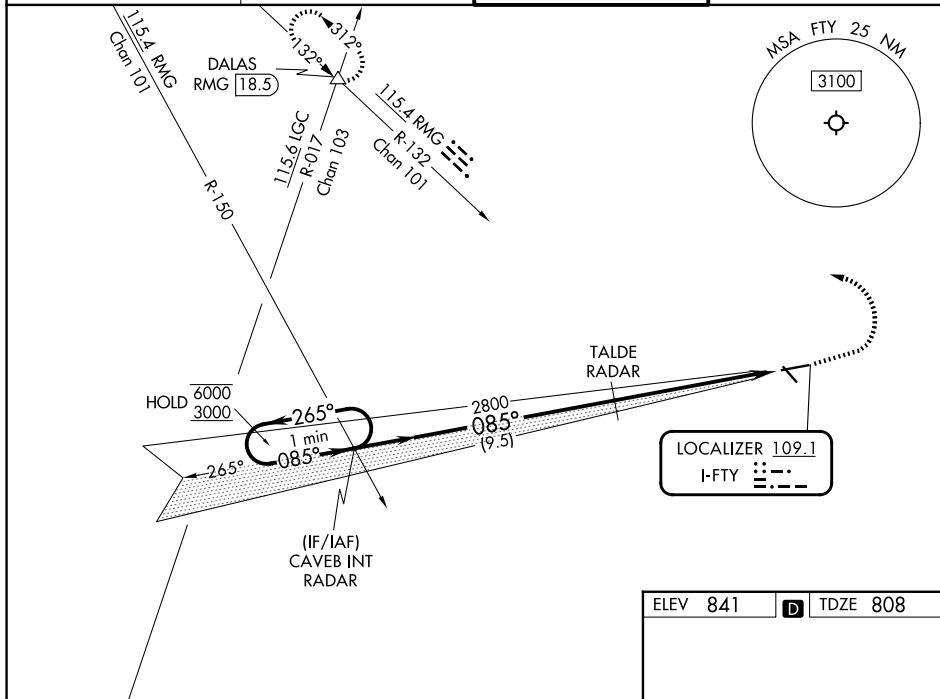

One Minute Holding Pattern

CAVED INT RADAR

TALDE RADAR

*2800

9.5 NM

6.1 NM

CATEGORY	A	B	C	D
S-ILS 8	1058-1/2 250 (300-1/2)			
S-LOC 8	1640-3/4 832 (800-3/4)		1640-17/8 832 (800-17/8)	
CIRCLING	1640-1 799 (800-1)	1640-11/4 799 (800-11/4)	1740-23/4 899 (900-23/4)	1740-3 899 (900-3)

SE-4, 25 DEC 2025 to 22 JAN 2026

SE-4. 25 DEC 2025 to 22 JAN 2026