

|                   |             |          |             |
|-------------------|-------------|----------|-------------|
| LOM CI            | APP CRS     | Rwy Ldg  | <b>7203</b> |
| <b><u>400</u></b> | <b>337°</b> | TDZE     | <b>796</b>  |
|                   |             | Apt Elev | <b>799</b>  |

APP CRS  
337°

|          |             |
|----------|-------------|
| Rwy Ldg  | <b>7203</b> |
| TDZE     | <b>796</b>  |
| Apt Elev | <b>799</b>  |

NDB RWY 34  
CHIPPEWA COUNTY INTL (CIU)

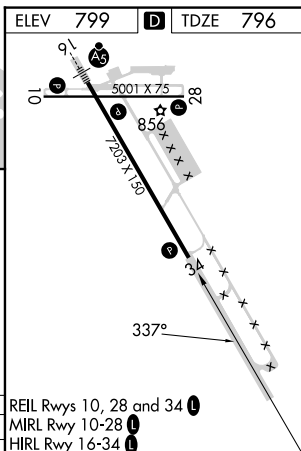
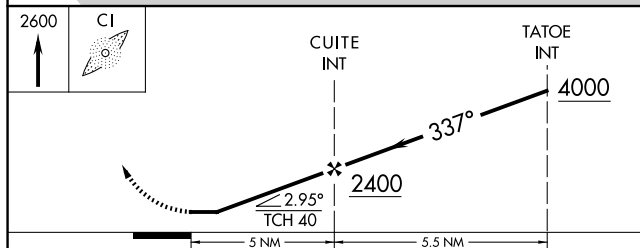
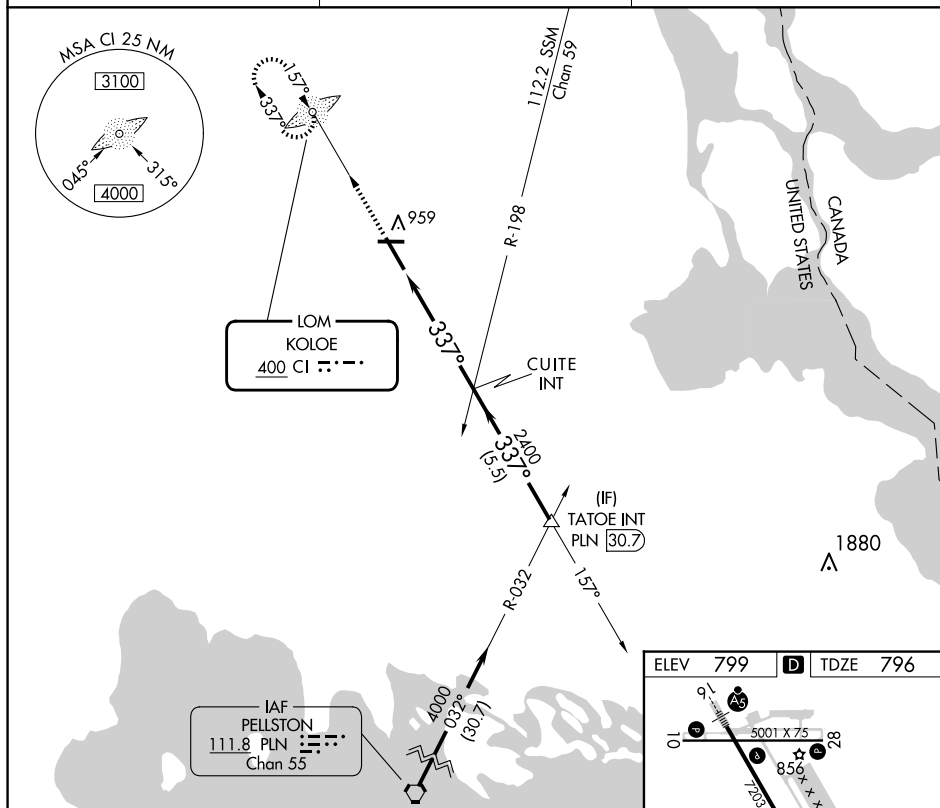
T  
A

When local altimeter setting not received, use Sault-Ste Marie Muni/  
Sanderson Fld altimeter setting and increase all MDA 60 feet and  
increase S-34 Cat C/D visibility to  $1\frac{3}{8}$ .

**MISSED APPROACH:** Climb to 2600 direct KOLOE LOM and hold.

AWOS-3PT  
**127.575**

TORONTO CENTER  
132.65 344.5

UNICOM  
123.0 (CTAF) 

| CATEGORY   | A      | B           | C                       | D                     |
|------------|--------|-------------|-------------------------|-----------------------|
| S-34       | 1220-1 | 424 (500-1) | 1220-1½                 | 424 (500-1½)          |
| C CIRCLING | 1260-1 | 461 (500-1) | 1260-1½<br>461 (500-1½) | 1360-2<br>561 (600-2) |

REIL Rwy 10, 28 and 34 **L**  
MIRL Rwy 10-28 **L**  
HIRL Rwy 16-34 **L**

| FAF to MAP 5 NM |      |      |      |      |      |
|-----------------|------|------|------|------|------|
| Knots           | 60   | 90   | 120  | 150  | 180  |
| Min:Sec         | 5:00 | 3:20 | 2:30 | 2:00 | 1:40 |