
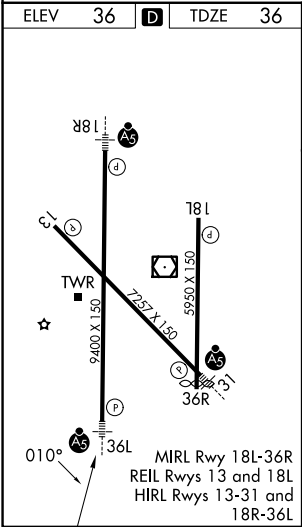




VOR/DME HRL	APP CRS	Rwy Ldg	9400
113.65	010°	TDZE	36
Chan 83 (Y)		Apt Elev	36

VOR RWY 36L
VALLEY INTL (HRL)

DME required.		MAISR	MISSED APPROACH: Climb to 1600 then right turn direct HRL VOR/DME and hold.
When local altimeter setting not received, use Port Isabel altimeter setting and increase all MDAs 60 feet and S-36L visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. VDP NA when using PIL altimeter setting.			

ATIS	VALLEY APP CON	HARLINGEN TOWER ★	GND CON	UNICOM
124.85	120.7 279.5	119.3(CTAF) 0 317.6	121.7	122.95

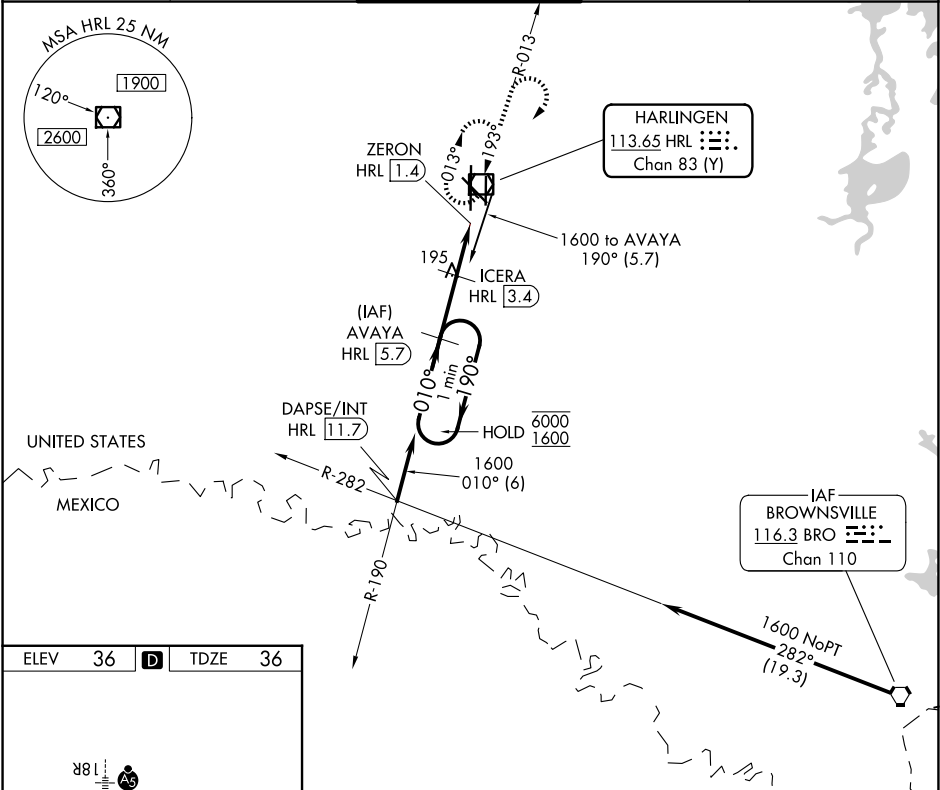

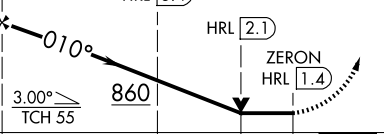VGSI and descent angles not coincident (VGSI Angle 3.00°/TCH 74).		1600		HRL
One Minute Holding Pattern				
AVAYA HRL 5.7		ICERA HRL 3.4		
				
3.00° TCH 55		HRL 2.1 ZERON HRL 1.4		
2.3 NM		1.3 NM		0.7 NM
A		B		D
CATEGORY	A		C	
S-36L	460-1 424 (500-1)		460-1¼ 424 (500-1¼)	
CIRCLING	460-1 424 (500-1)		680-2 644 (700-2)	