

HI-TACAN Y RWY 23

|                      |                  |                                           |
|----------------------|------------------|-------------------------------------------|
| TACAN NBC<br>Chan 42 | APCH CRS<br>221° | Rwy ldg 12,202<br>TDZE 16<br>Arpt Elev 37 |
|----------------------|------------------|-------------------------------------------|

[USN]

BEAUFORT MCAS (MERRITT FLD) (KNBC)

When ALS inop, increase vis to 1 mile.

ALS F-1

MISSED APPROACH: Climb to 500, then climbing right turn to 3000, intercept NBC TACAN R-307 direct BRAYS and hold.


|                   |                                                                       |                           |                           |                            |         |
|-------------------|-----------------------------------------------------------------------|---------------------------|---------------------------|----------------------------|---------|
| ATIS ★<br>279.525 | APP CON<br>(ABV 3000) 125.125 292.125<br>(3000 and BLW) 123.7 269.125 | TOWER ★<br>119.05 342.875 | GND CON<br>128.15 348.625 | CLNC DEL<br>128.15 254.375 | ASR/PAR |
|-------------------|-----------------------------------------------------------------------|---------------------------|---------------------------|----------------------------|---------|

|          |     |      |      |      |      |      |
|----------|-----|------|------|------|------|------|
| Knots    | 60  | 120  | 180  | 240  | 300  | 360  |
| V/V(fpm) | 545 | 1090 | 1635 | 2180 | 2725 | 3270 |


Min climb of 545 ft/NM to 3000 - controlling obstacle unk

CAUTION: FAC 88 ft from RCL at 3000 ft from rwy thld.

CAUTION: Intmed seg len 4 NM.

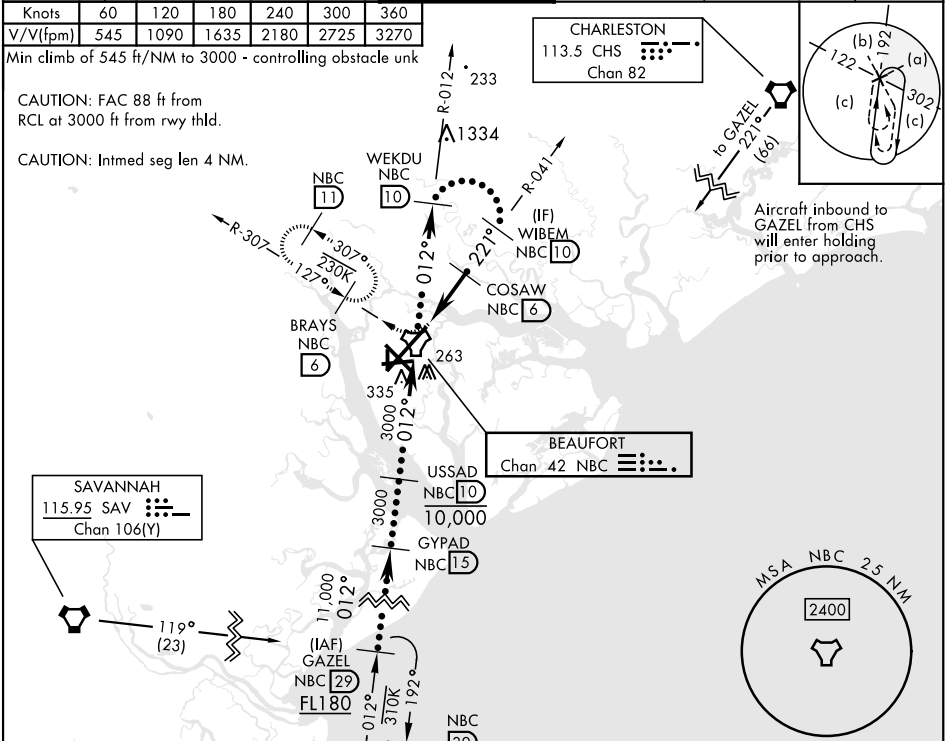


EMERG SAFE ALT 100 NM 3100

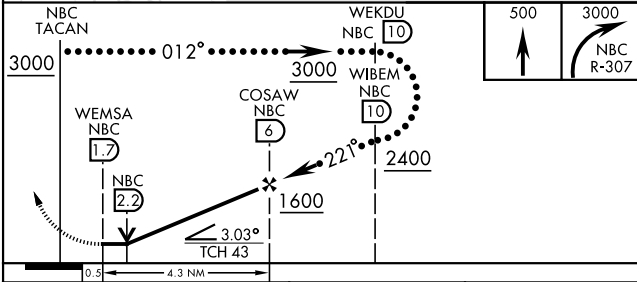

|          |                              |                      |                              |
|----------|------------------------------|----------------------|------------------------------|
| CATEGORY | C                            | D                    | E                            |
| S-23 *   | 380-3/4                      | 364                  | (400-3/4)                    |
| CIRCLING | 580-1 1/2<br>543 (600-1 1/2) | 600-2<br>563 (600-2) | 740-2 1/2<br>703 (800-2 1/2) |

|                         |         |
|-------------------------|---------|
| ELEV 37                 | TDZE 16 |
| HIRL Rwy 5-23 and 14-32 |         |

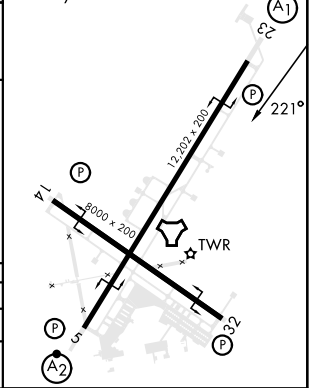

HI-TACAN Y RWY 23