


VOR/DME MFE 117.2 Chan 119	APP CRS 305°	Rwy Ldg 7120 TDZE 102 Apt Elev 107
--	------------------------	---

VOR RWY 32
MC ALLEN INTL (MFE)

⚠ Circling NA northeast of Rwy 14-32. When local altimeter setting not received, use Weslaco altimeter setting and increase all MDA 40 feet and S-32 Cat C/D and Circling Cat C visibility 1/8 mile, increase DIVAN Fix Minimums S-32 Cat C/D visibility 1/8 mile. VDP NA when using Weslaco altimeter setting.			MISSED APPROACH: Climb to 900 then climbing right turn to 2100 direct MFE VOR/DME.	
ATIS 128.5	VALLEY APP CON 126.55 377.2	MC ALLEN TOWER* 118.5 (CTAF) 0 256.9	GND CON 121.8	UNICOM 122.95

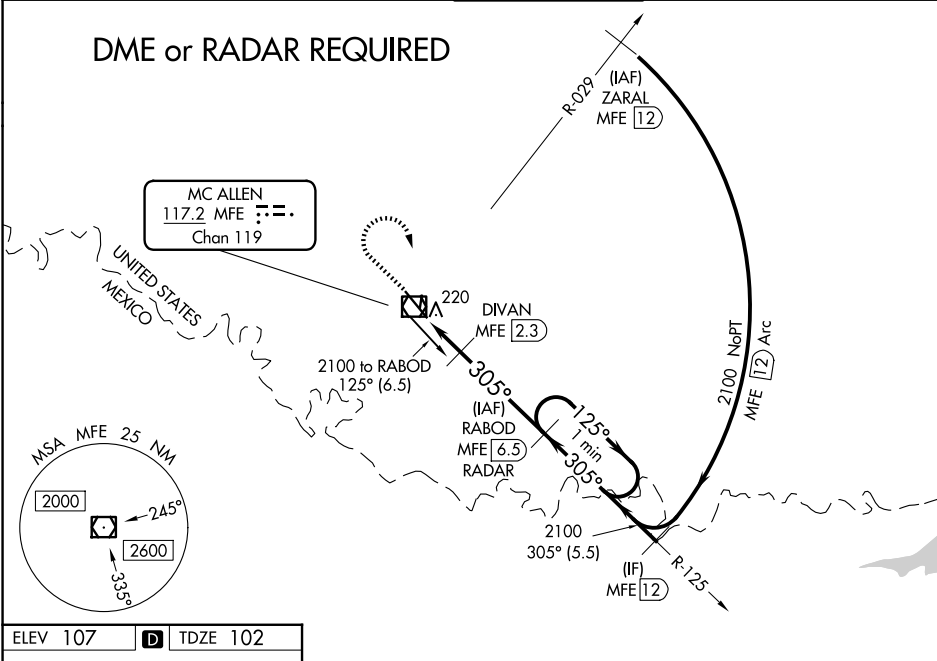

ELEV 107	D	TDZE 102
REIL Rwy 32 HIRL Rwy 14-32 MIRL Rwy 18-36		
FAF to MAP 5.9 NM		
Knots	60	90 120 150 180
Min:Sec	5:54	3:56 2:57 2:22 1:58

900 2100 MFE			
RABOD MFE 6.5 RADAR One Minute Holding Pattern			
MFE VOR/DME MFE 0.6 MFE 1.6 DIVAN MFE 2.3			
1 NM 0.7 NM 4.2 NM			
CATEGORY	A	B	C D
S-32	660-1	558 (600-1)	660-1½ 558 (600-1½)
CIRCLING	660-1	553 (600-1)	660-1½ 553 (600-1½) 800-2¼ 693 (700-2¼)
DIVAN FIX MINIMUMS			
S-32	480-1 378 (400-1)		
CIRCLING	580-1	473 (500-1)	580-1½ 473 (500-1½) 800-2¼ 693 (700-2¼)

SC-3, 25 DEC 2025 to 22 JAN 2026

SC-3, 25 DEC 2025 to 22 JAN 2026