


WAAS CH 81812 W05A	APP CRS 051°	Rwy Idg 6001 TDZE 726 Apt Elev 728
--	------------------------	---

RNAV (GPS) RWY 5

WAUKEGAN NTL (UGN)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2300 direct LIRIC and hold.
▼ ▲ Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 14, 32 NA at night.	

ATIS 132.4	CHICAGO APP CON 120.55	WAUKEGAN TOWER ★ 120.05 (CTAF) 273.55	GND CON 121.65
----------------------	----------------------------------	--	--------------------------

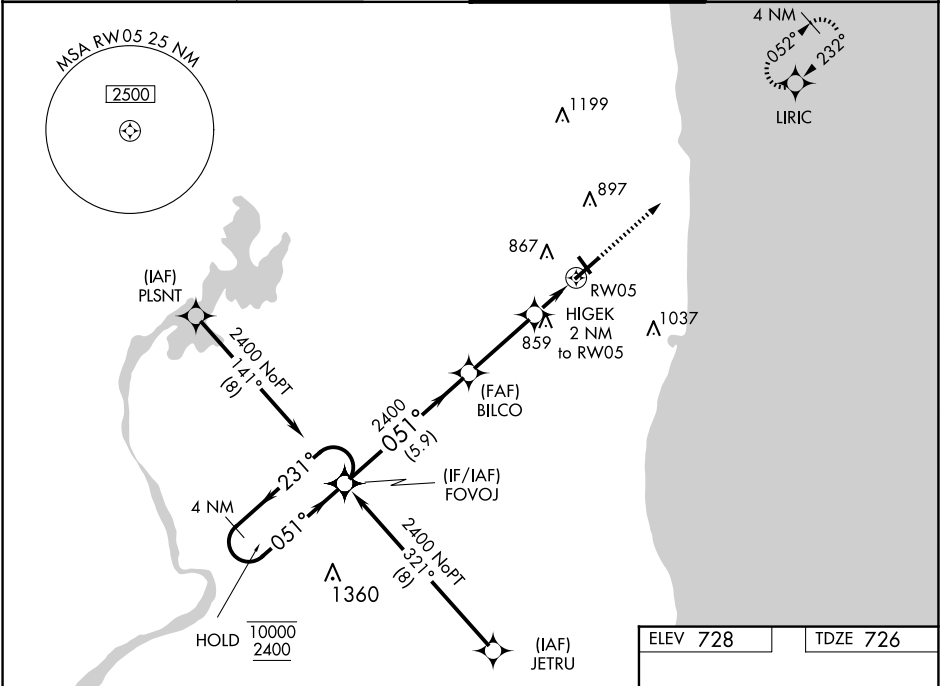

4 NM Holding Pattern				
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).				
FOVOJ BILCO HIGEK 2 NM to RW05 1.1 NM to RW05 RW05 10000 ← 231° 2400 ← 051° GP 3.00° TCH 40 2400 1400 5.9 NM 3.1 NM 0.9 NM 1.1 NM				
CATEGORY	A	B	C	D
LPV DA	976-¾ 250 (300-¾)			
LNAV/VNAV DA	1013-⅞ 287 (300-⅞)			
LNAV MDA	1120-1	394 (400-1)	1120-1⅛	394 (400-1⅛)
CIRCLING	1220-1	492 (500-1)	1220-1½	1400-2¼
			492 (500-1½)	672 (700-2¼)

