

WAAS CH 49000 W21A	APP CRS 205°	Rwy Ldg TDZE Apt Elev	5003 1216 1216
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21

SAWYER COUNTY (HYR)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 54°C (130°F). For inop MALSR, increase LNAV/VNAV all Cats visibility to 1½ mile and LNAV Cat A and B visibility to 1 mile. Rwy 21 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwy's 16 and 34.

MALSR

MISSED APPROACH:
Climb to 3100 direct RIGET and hold.

ASOS 118.4	MINNEAPOLIS CENTER 126.45 276.4	UNICOM 122.8 (CTAF) 0
----------------------	---	---------------------------------

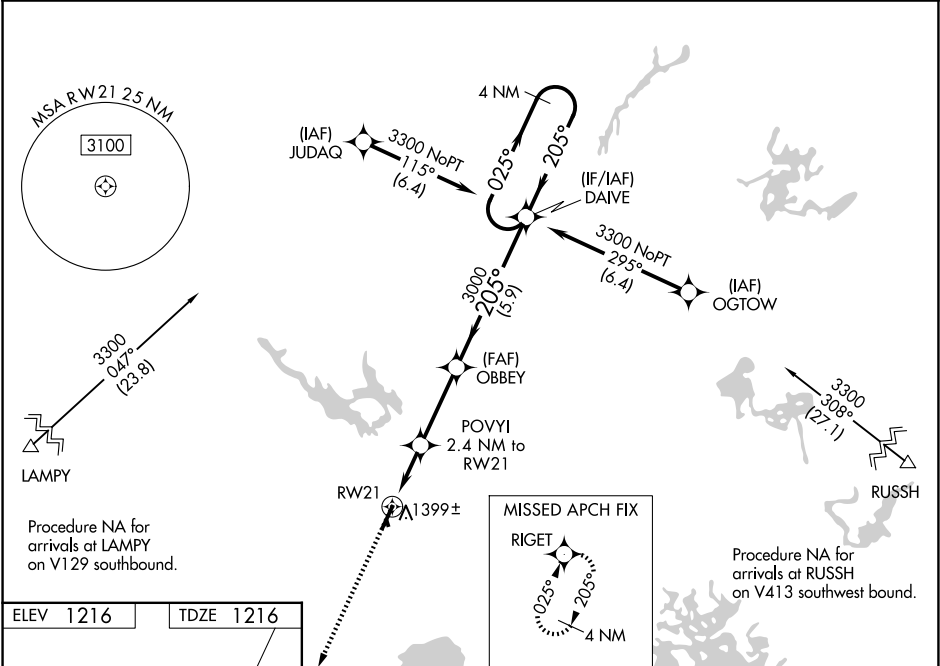

ELEV 1216 TDZE 1216

205°

21

AS

3003

100

1088 X 120

34

REIL Rwy 3 0
HIRL Rwy 3-21 0

	3100	RIGET	POVYI 2.4 NM to RW21	OBBEY 3000	DAIVE	4 NM Holding Pattern
			*1.2 NM to RW21	*2020	3000	GP 3.00° TCH 42
CATEGORY	A	B	C	D		
LPV DA		1518-¾	302 (400-¾)			
LNAV/VNAV DA		1560-¾	344 (400-¾)			
LNAV MDA		1640-¾	424 (500-¾)			
CIRCLING	1860-1 644 (700-1)	2060-1¼ 844 (900-1¼)	2120-2¾ 904 (1000-2¾)	2120-3 904 (1000-3)		