

APP CRS
063°

Rwy Ldg
TDZE
20

Apt Elev
20

RNAV (GPS) RWY 6

APALACHICOLA RGNL-CLEVE RANDOLPH FLD (AAF^F)


RNP APCH - GPS.

▼
▲

Rwy 6 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use ECP altimeter setting and increase all MDAs 140 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ½ SM. Straight-in Rwy 6 NA at night, Circling Rwy 6, 18, 24, 32, 36 NA at night.

MISSED APPROACH: Climb to 3000 direct ONBOE and hold.

ASOS 119.925	TYNDALL APP CON ★ 124.15	UNICOM 122.8 (CTAF) 0
------------------------	------------------------------------	---------------------------------

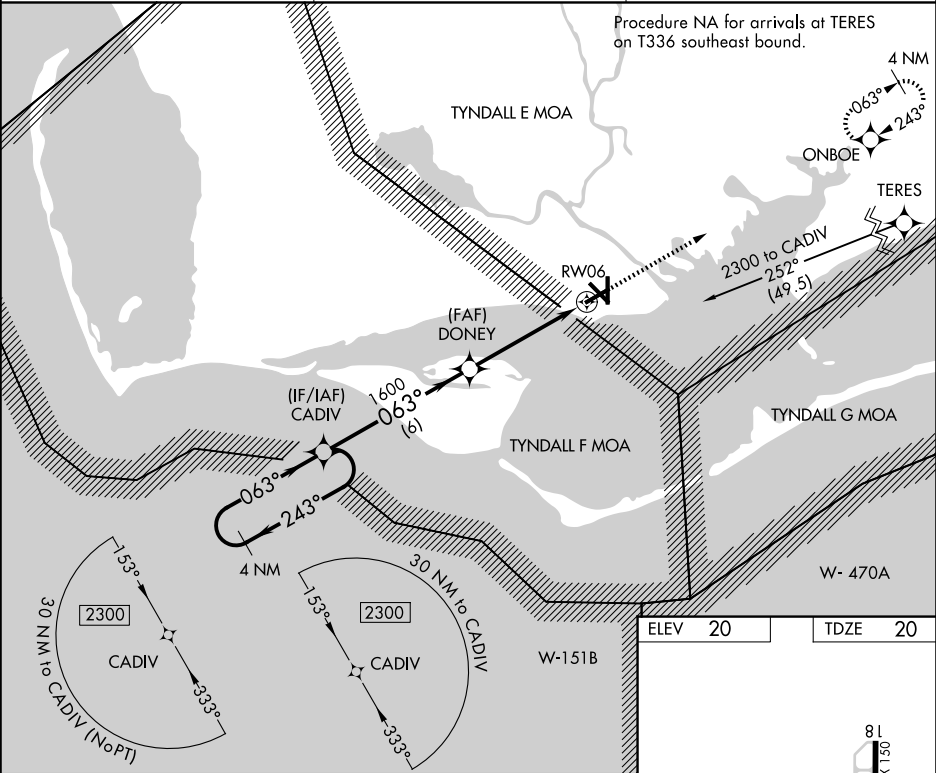

4 NM Holding Pattern

CADIV

2300 ← 243°

063° →

DONEY

3.00° TCH 40

RW06

1600

6 NM

4.8 NM

3000

ONBOE

CATEGORY	A	B	C	D
LNAV MDA	460-1	440 (500-1)	460-1⅓	440 (500-1⅓)
CIRCLING	520-1	500 (500-1)	680-1¾ 660 (700-1¾)	680-2 660 (700-2)

ELEV 20

TDZE 20

MIRL Rwy 6-24 and 14-32 0

MIRL diagram showing runway lights and altitudes: 81, 5425 X 150, 5271 X 150, 5251 X 150, 3632, 063°.