

WAAS
CH **72922**
W36A

APP CRS
005°

Rwy Ldg
TDZE **721**
Apt Elev **730**

RNAV (GPS) RWY 36

WATERBURY-OXFORD (OXC)

RNP APCH - GPS.


⚠

Rwy 36 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using DXR altimeter setting. When local altimeter setting not received, use DXR altimeter setting: increase LPV DA to 1049 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1175 feet and all visibilities ⅓ SM; increase all MDAs 80 feet and LNAV visibility Cats C and D ⅓ SM, and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH:

Climb to 3000 direct ZATMI and hold, continue climb-in-hold to 3000.

ATIS 132.975	NEW YORK APP CON 124.075 343.65	OXFORD TOWER ★ 118.475 (CTAF) 0	GND CON 121.65	CLNC DEL 121.65	CLNC DEL 135.1 (When twr closed)	UNICOM 122.95
------------------------	---	---	--------------------------	---------------------------	---	-------------------------

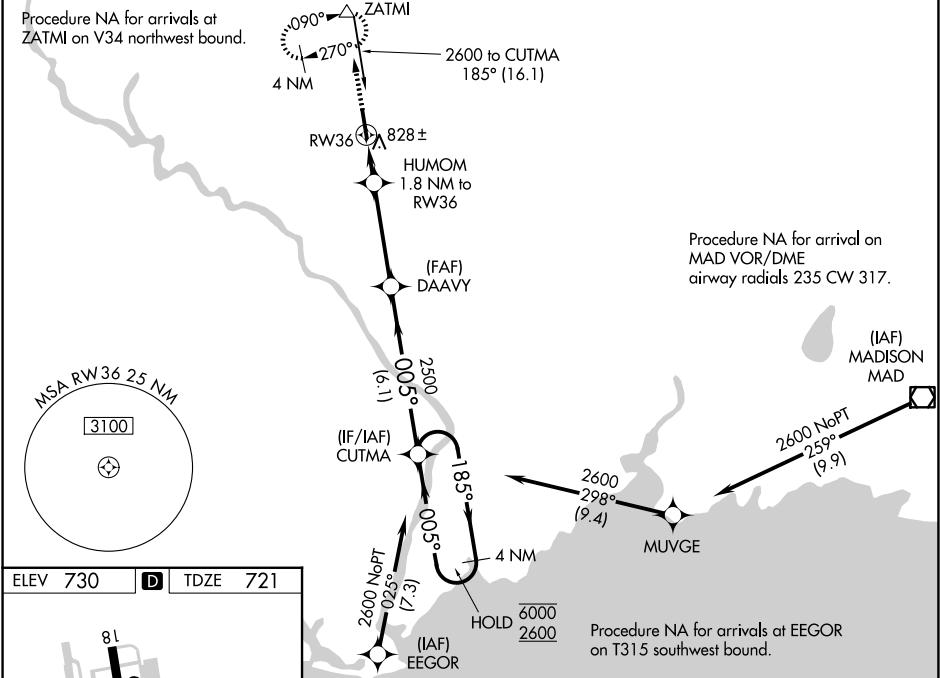

3000	ZATMI	HUMOM 1.8 NM to RW36	DAAVY 2500	CUTMA	4 NM Holding Pattern
1.2 NM to RW36	1.2 NM to RW36	0.6 NM	3.8 NM	6.1 NM	
1.2	0.6 NM	3.8 NM	6.1 NM		
CATEGORY	A	B	C	D	
LPV DA		971-¾	250 (300-¾)		
LNAV/VNAV DA		1097-1	376 (400-1)		
LNAV MDA	1120-1	399 (400-1)	1120-1⅛	399 (400-1⅛)	
CIRCLING	1360-1	630 (700-1)	1380-1¾ 650 (700-1¾)	1460-2¼ 730 (800-2¼)	