

VORTAC LAL	APP CRS	Rwy Idg	3950
116.0	275°	TDZE	154
Chan 107		Apt Elev	154


VOR RWY 28
PLANT CITY (PCM)

⚠ **NA**

When local altimeter setting not received, use Lakeland altimeter setting and increase all MDA 20 feet. Straight-in and Circling Rwy 28 NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing right turn to 2000 direct LAL VORTAC and hold.

AWOS-3 120.025	TAMPA APP CON 120.65 290.3	CLNC DEL 121.725 (GCO)	UNICOM 123.05 (CTAF) 0
-------------------	-------------------------------	---------------------------	----------------------------------

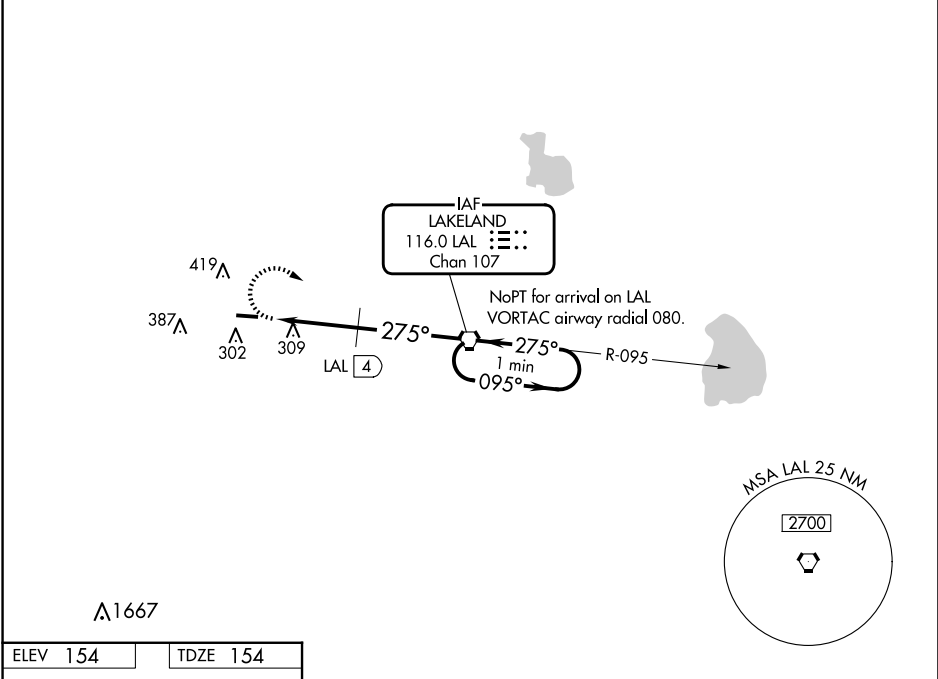

ELEV 154

TDZE 154

MRL Rwy 10-28 **0**

REIL Rws 10 and 28 **0**

FAF to MAP 7.7 NM

Knots	60	90	120	150	180
Min:Sec	7:42	5:08	3:51	3:05	2:34

2000		LAL	One Minute Holding Pattern			
						
		LAL 7.7	LAL 4	800		
		275°		095° → 2000		
		← 275°				
		3.7 NM		4 NM		
CATEGORY	A		B		C	D
S-28	800-1		646 (700-1)		NA	
 CIRCLING	800-1		646 (700-1)		NA	
DME MINIMUMS						
S-28	600-1		446 (500-1)		NA	
 CIRCLING	700-1		800-1		NA	
		546 (600-1)		646 (700-1)		