

WAAS CH 78427 W18A	APP CRS 181°	Rwy Ldg TDZE 905 Apt Elev 906
--	------------------------	---

RNAV (GPS) RWY 18

REEDSBURG MUNI (C35)



▼

NA

Use Baraboo altimeter setting; when not received, use Lone Rock altimeter setting and increase all MDA 60 feet. DME/DME RNP-0.3 NA. Procedure NA at night. Visibility reduction by helicopters NA.

MISSED APPROACH: Climbing left turn to 3500 direct DLL VORTAC and hold.

AWOS-3PT 118.95	DLL AWOS-3 118.325	MADISON APP CON ★ 135.45 343.7	UNICOM 122.8 (CTAF) ①
---------------------------	------------------------------	--	---------------------------------

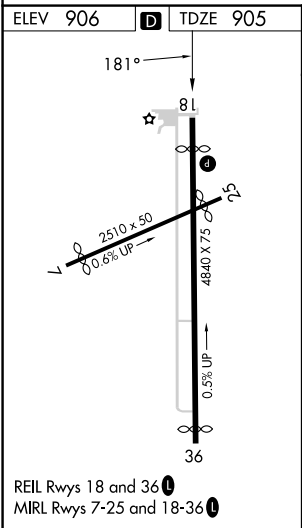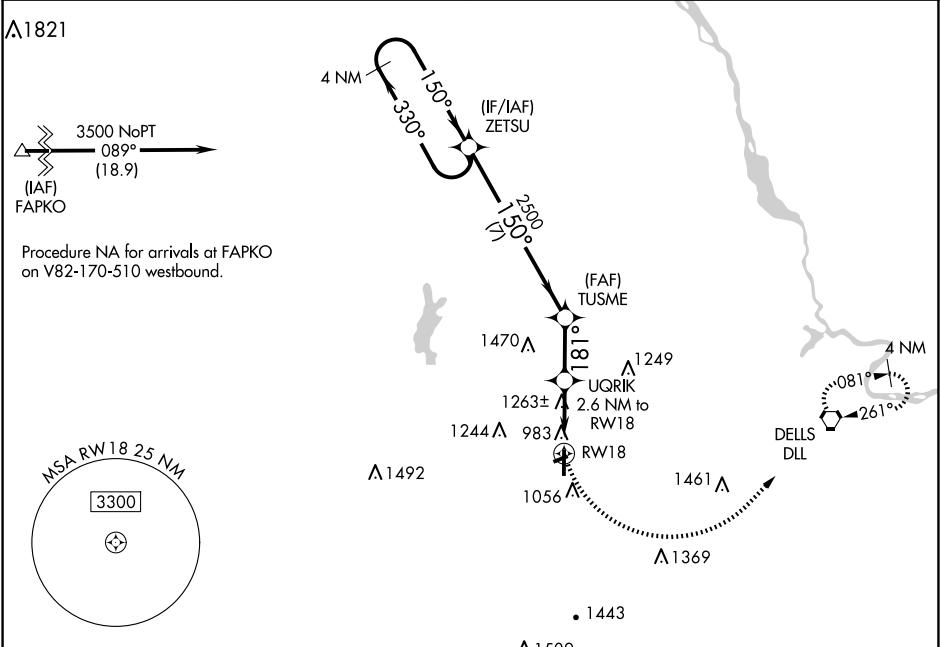

3500 DLL		TUSME 3.00° TCH 50		ZETSU 4 NM Holding Pattern
RW18		UQRIK 2.6 NM to RW18	2500	3500
1780		VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).		
2.6 NM		2.3 NM	7 NM	
CATEGORY	A	B	C	D
LP MDA	1560-1	655 (700-1)	NA	
LNAV MDA	1580-1	675 (700-1)	NA	
CIRCLING	1600-1	694 (700-1)	NA	

EC-3, 25 DEC 2025 to 22 JAN 2026

EC-3, 25 DEC 2025 to 22 JAN 2026