


WAAS CH 65619 W06A	APP CRS 058°	Rwy Idg 12000 TDZE 27 Apt Elev 30
--	------------------------	--

RNAV (GPS) Y RWY 6

SOUTHWEST FLORIDA INTL (RSW)

RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500, and LNAV Cats C and D visibility to RVR 5500.			MALSR	MISSED APPROACH: Climb to 1000 then climbing right turn to 2300 direct CORFU and hold.	
D-ATIS 124.65	FORT MYERS APP CON ★ 125.15 306.2 (RWY 6) 126.8 306.2 (RWY 24)	FORT MYERS TOWER ★ 128.75 (CTAF) 0 257.8	GND CON 121.9 257.8	CINC DEL 132.075	UNICOM 122.95

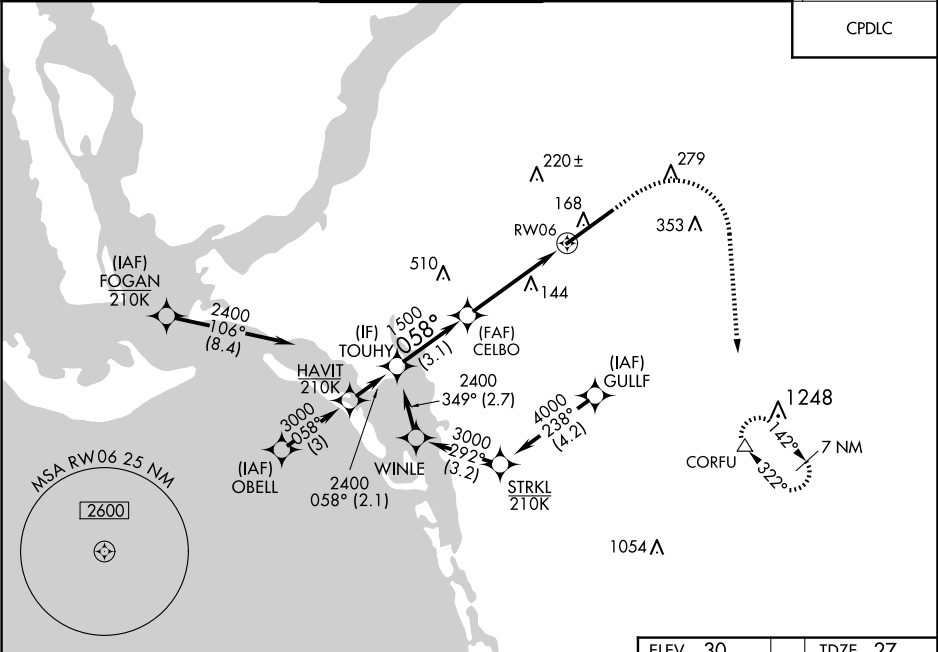

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).		ELEV 30		TDZE 27	
TOUHY		1000		2300	
2400		↑		CORFU	
GP 3.00° TCH 55		1500		△	
058°		1 NM to RWY 06		RWY 06	
3.1 NM		3.5 NM		1 NM	
CATEGORY	A	B	C	D	
LPV DA	227/18		200 (200-½)		
LNAV/VNAV DA	392/35		365 (400-⅝)		
LNAV MDA	400/24	373 (400-½)	400/35	373 (400-⅝)	
CIRCLING	560-1	530 (600-1)	580-1½ 550 (600-½)	660-2 630 (700-2)	

REIL Rwy 24
TDZ/CL Rwy 6
HIRL Rwy 6-24