

APP CRS
346°

Rwy Idg
TDZE
Apt Elev

7025
6221
6221

RNAV (GPS) RWY 34

AFTON LINCOLN COUNTY/GENERAL BOYD L EDDINS FLD (AFO)

RNP APCH - GPS.

⚠

NA

❄ -18°C

Circling NA east of Rwy 16-34. Procedure NA at night.

Rwy 34 helicopter visibility reduction below 1 SM NA.


When Afton altimeter setting not received, procedure NA.

MISSED APPROACH: (Do not exceed 200K until IVAYU)
Climb to 8080 then climbing left turn to 11700 direct IVAYU and hold.
*Missed approach requires minimum climb of 364 feet per NM to 8900.

AWOS-3P
119.025

SALT LAKE CENTER
128.35 239.25

UNICOM
122.8 (CTAF) ①

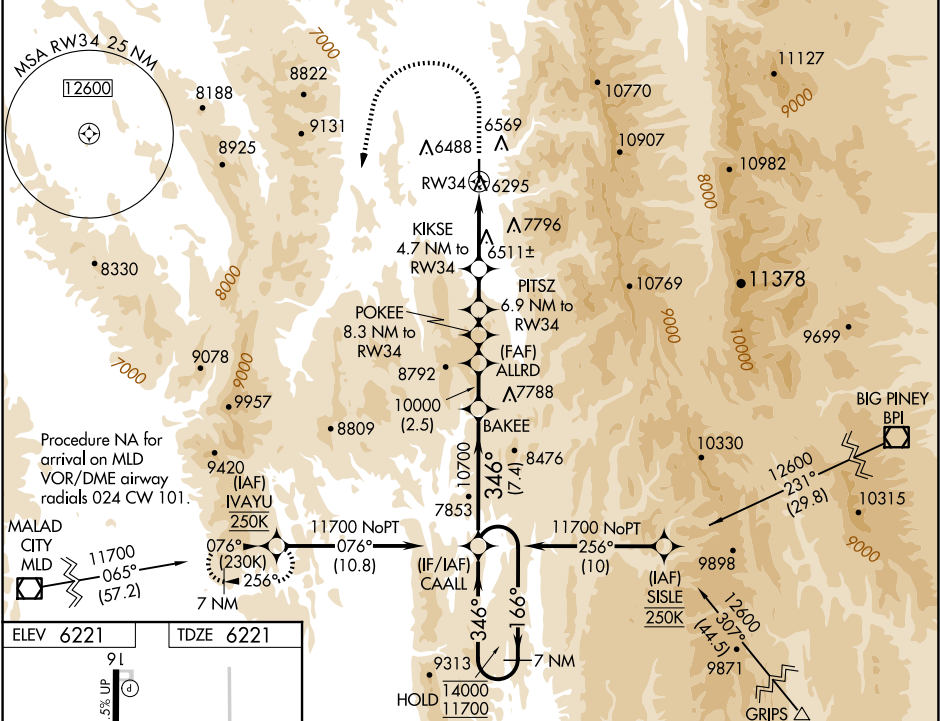

ELEV 6221

TDZE 6221

91

0.5 UP

7025 X 75

34

MIRL Rwy 16-34 ①

REIL Rwy 16 and 34 ①

VGSI and descent angles not coincident (VGSI Angle 3.50/TCH 52).				
7 NM Holding Pattern				
14000 ← 166°				
11700 → 346°				
10700				
10000				
9420				
8900				
8060				
-7.4 NM - 2.5 NM - 1.5 NM - 1.4 NM - 2.2 NM - 4.7 NM				
CATEGORY	A	B	C	D
INAV MDA*	7520-1¼ 1299 (1300-1¼)	7520-1½ 1299 (1300-1½)	7520-3 1299 (1300-3)	NA
INAV MDA	7800-1¼ 1579 (1600-1¼)	7800-1½ 1579 (1600-1½)	7800-3 1579 (1600-3)	NA
CIRCLING	7800-1¼ 1579 (1600-1¼)	7800-1½ 1579 (1600-1½)	7800-3 1579 (1600-3)	NA