WAAS CH **90347** **W17A**	APP CRS **166°**	Rwy Ldg **3500** TDZE **1309** Apt Elev **1309**

RNAV (GPS) RWY 17
REDFIELD MUNI (1D8)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using ABR altimeter setting. When local altimeter not received, use ABR altimeter setting and increase LPV DA to 1643 feet; increase LNAV/VNAV DA to 1738 feet and all visibilites ¼ SM. Increase all MDAs 100 feet.

MISSED APPROACH: Climb to 3400 direct LAVDE and hold.

AWOS-3P	MINNEAPOLIS CENTER	UNICOM
118.525	**126.25 339.8**	**122.8** (CTAF) L

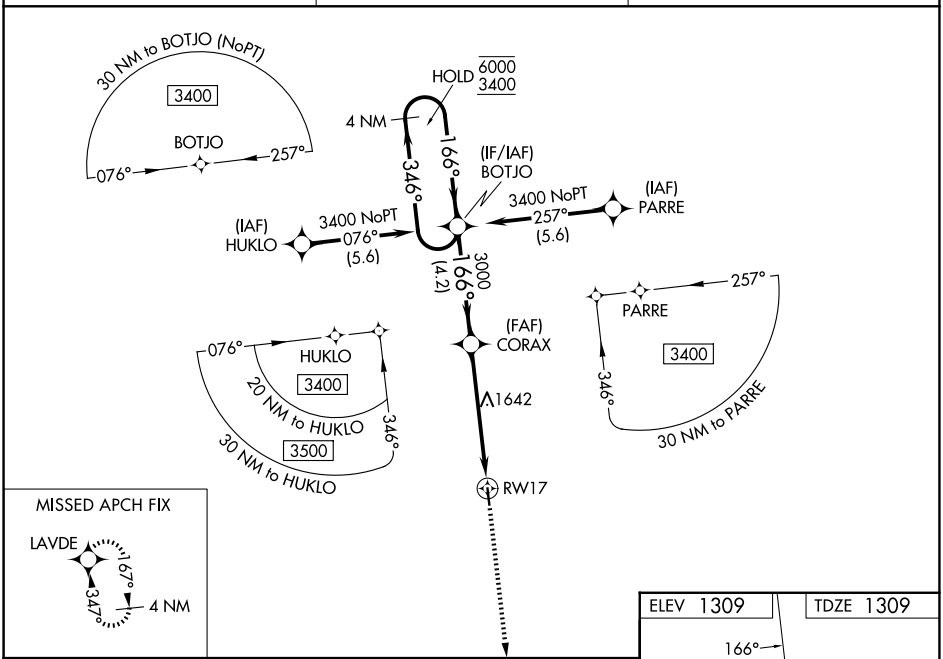

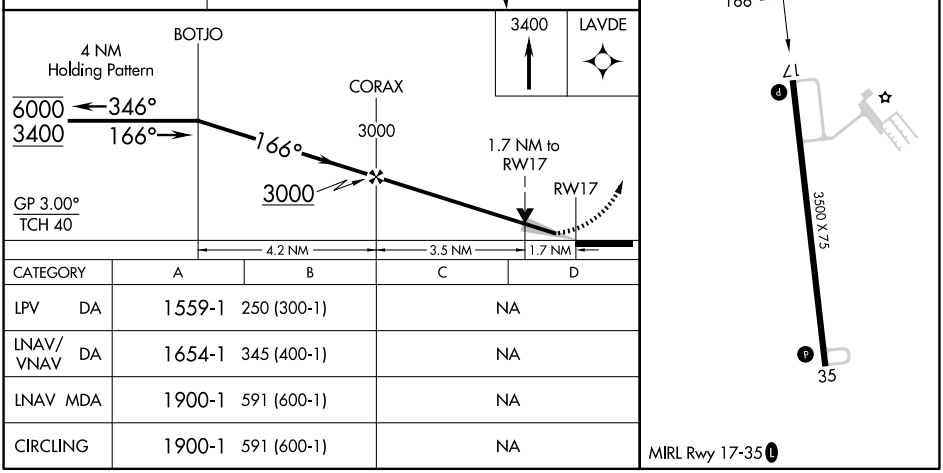

CATEGORY	A	B	C	D
LPV DA	1559-1	250 (300-1)	NA	
LNAV/VNAV DA	1654-1	345 (400-1)	NA	
LNAV MDA	1900-1	591 (600-1)	NA	
CIRCLING	1900-1	591 (600-1)	NA	

NC-1, 25 DEC 2025 to 22 JAN 2026

NC-1, 25 DEC 2025 to 22 JAN 2026