

WAAS CH 81827 W16A	APP CRS 164°	Rwy Ldg TDZE 369 Apt Elev 374
--	------------------------	---

RNAV (GPS) Y RWY 16L

MAHLON SWEET FLD (EUG)

RNP APCH.


⚠

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For Inop ALS, increase LNAV/VNAV all Cats visibility to 7/5 SM, increase LNAV Cat C/D visibility to 1 SM.


MALSR

MISSED APPROACH: Climb to 5500 direct WELID and on track 160° to SAGIN and hold, continue climb-in-hold to 5500.

ATIS 125.225	CASCADE APP CON★ 119.6 348.7	EUGENE TOWER★ 118.9 (CTAF) 371.9 (16R/34L) 124.15 371.9 (16L/34R)	GND CON 121.7 269.5	UNICOM 122.95
------------------------	--	--	-------------------------------	-------------------------

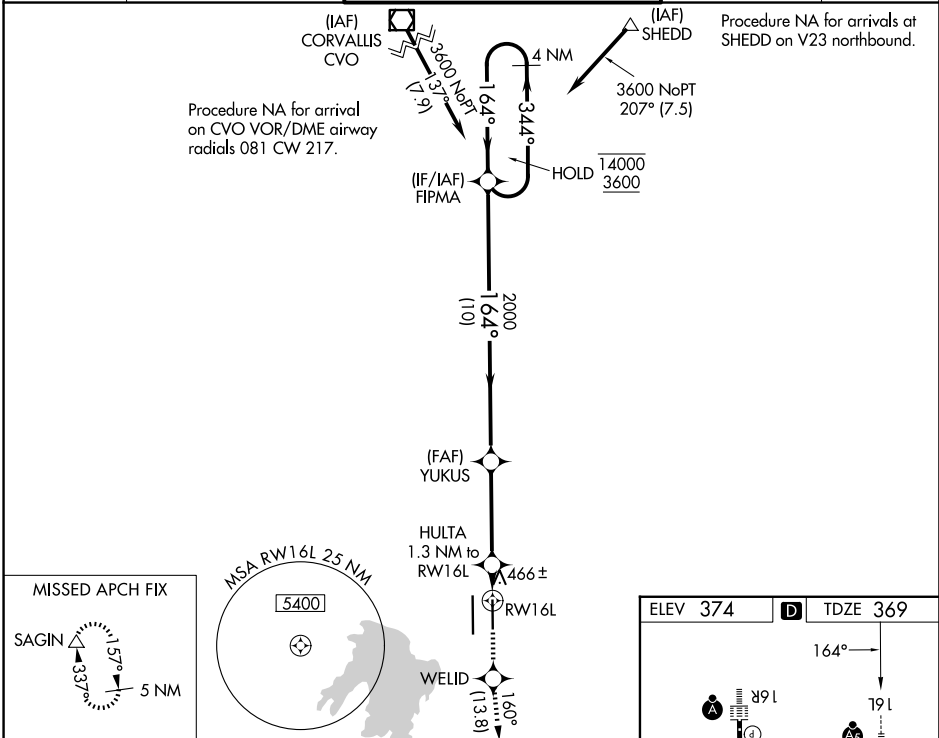

4 NM Holding Pattern		FIPMA	YUKUS	5500	WELID	tr 160°	SAGIN
14000 ← 344°		164° →	2000	2000	HULTA 1.3 NM to RWY 16L	*RNAV only	
GP 3.00° TCH 52			2000		*820		
		10 NM	3.7 NM	1.3 NM			
CATEGORY	A	B	C	D			
LPV DA		569-1/2	200 (200-1/2)				
LNAV/VNAV DA		632-1/2	263 (300-1/2)				
LNAV MDA	720-1/2	351 (400-1/2)	720-5/8	351 (400-5/8)			
CIRCLING	820-1 446 (500-1)	840-1 466 (500-1)	1000-1 3/4 626 (700-1 3/4)	1140-2 1/2 766 (800-2 1/2)			

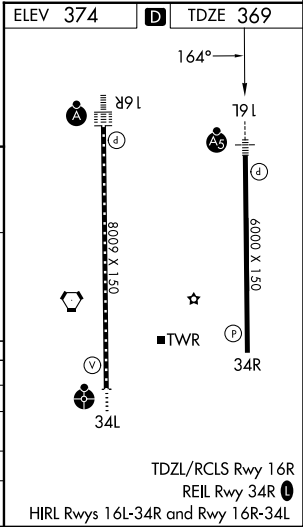

NW-1, 22 JAN 2026 to 19 FEB 2026

NW-1, 22 JAN 2026 to 19 FEB 2026