


APP CRS	Rwy Ldg	10000
116°	TDZE	9
	Apt Elev	9


RNAV (RNP) Z RWY 12
OAKLAND SAN FRANCISCO BAY (OAK)

RNP AR APCH.	MALSR	MISSED APPROACH: Climb direct HISIS to cross HISIS at or below 1600 then climb to 5400 on track 116° to YICPU and on track 103° to DECOT and hold, continue climb-in-hold to 5400.
For uncompensated Baro-VNAV systems, procedure NA below 0°C or above 54°C. For inop ALS increase RNP 0.15 visibility all Cats to RVR 4500, RNP 0.30 visibility all Cats to RVR 5500.		

D-ATIS 133.775	NORCAL APP CON 125.35 263.15	OAKLAND TOWER 118.3 291.65 (10L/R-28L/R, 15-33) 127.2 256.9 (12-30)	GND CON 121.9 (10L/R-28L/R, 15-33) 121.75 (12-30)
-------------------	---------------------------------	---	---

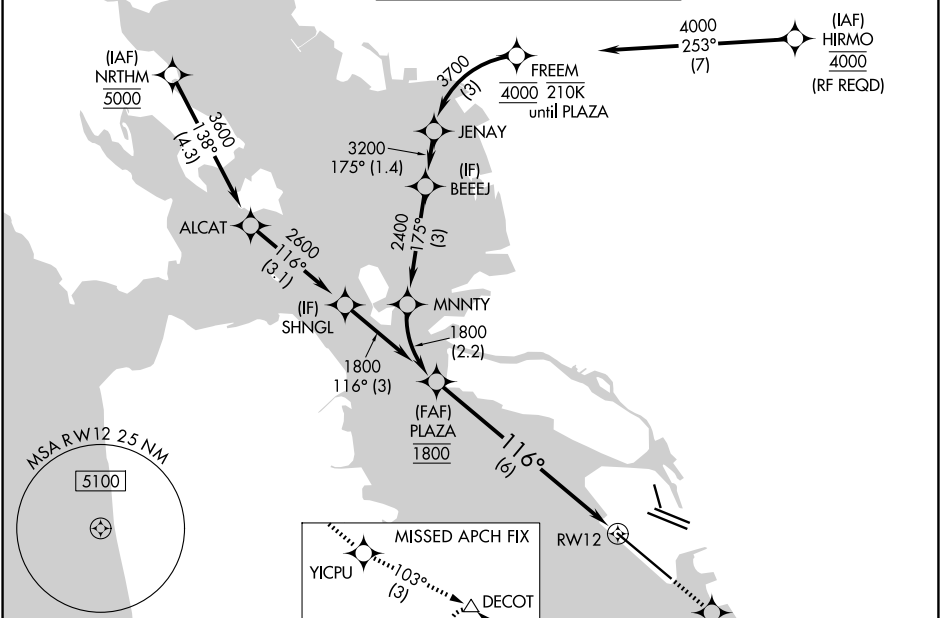

ELEV 9	D	TDZE 9
--------	---	--------

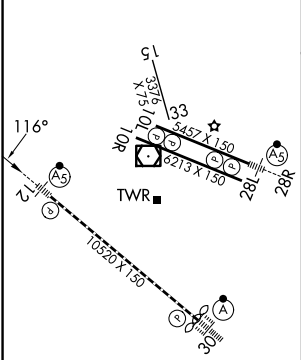

REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwy 12-30, 10L-28R, 10R-28L

See planview for multiple IF locations.					↑ HISIS 1600 ↑ 5400 tr 116° ✱ YICPU tr 103° △ DECOT				
PLAZA 1800 1800 GP 2.75° TCH 55 116° 6 NM RW12 VGSI and RNAV glidepath not coincident (VGSI Angle 2.75/TCH 70).									
CATEGORY		A	B		C		D		
RNP 0.15 DA		289/24 280 (300-½)							
RNP 0.30 DA		386/35 377 (400-⅓)							
AUTHORIZATION REQUIRED									

SW-2, 22 JAN 2026 to 19 FEB 2026

SW-2, 22 JAN 2026 to 19 FEB 2026