
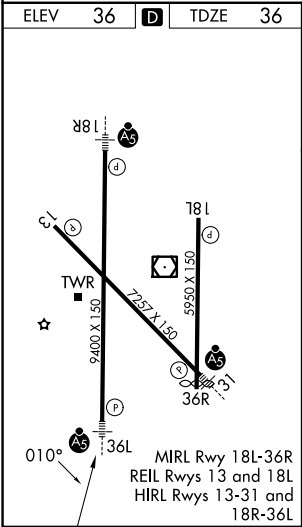


VOR/DME HRL	APP CRS	Rwy Ldg	9400
113.65	010°	TDZE	36
Chan 83 (Y)		Apt Elev	36

VOR RWY 36L
VALLEY INTL (HRL)

DME required.	MAISR	MISSED APPROACH: Climb to 1600 then right turn direct HRL VOR/DME and hold.
When local altimeter setting not received, use Port Isabel altimeter setting and increase all MDAs 60 feet and S-36L visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. VDP NA when using PIL altimeter setting.		

ATIS	VALLEY APP CON	HARLINGEN TOWER ★	GND CON	UNICOM
124.85	120.7 279.5	119.3(CTAF) 317.6	121.7	122.95

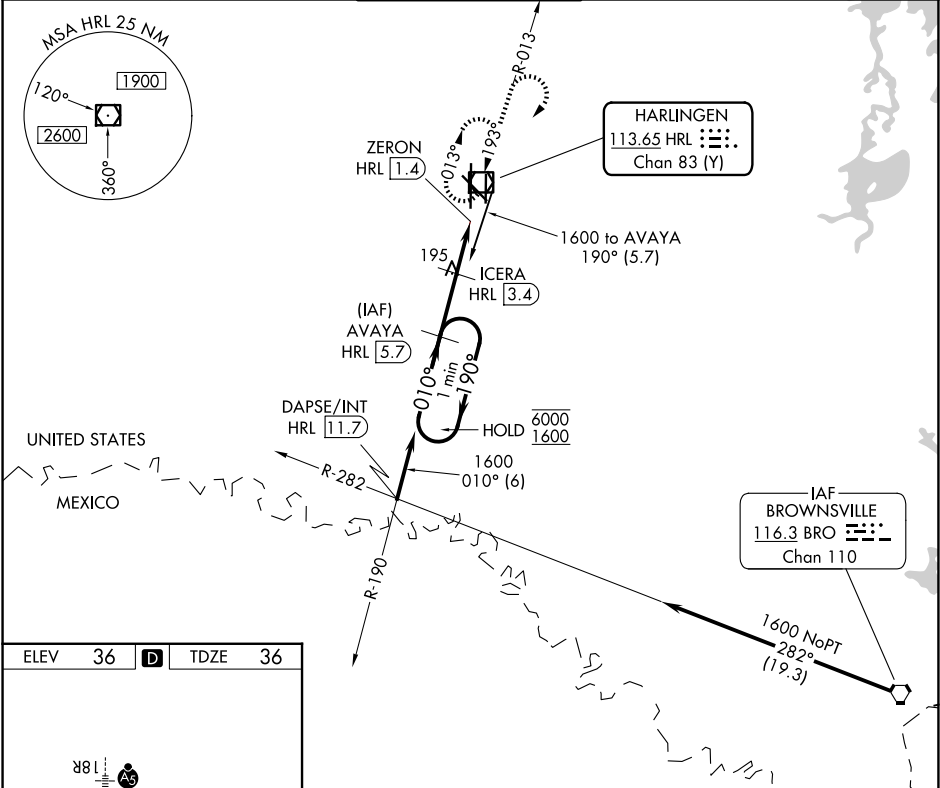

VGSI and descent angles not coincident (VGSI Angle 3.00°/TCH 74).				1600    HRL	
One Minute Holding Pattern				AVAYA HRL 5.7	
6000 1600 ←190° →010°				ICERA HRL 3.4	
010° 3.00° TCH 55				HRL 2.1	
860				ZERON HRL 1.4	
2.3 NM				1.3 NM	
0.7 NM				0.5	
CATEGORY	A	B	C	D	
S-36L	460-1	424 (500-1)	460-1¼	424 (500-1¼)	
CIRCLING	460-1 424 (500-1)	560-1 524 (600-1)	600-1½ 564 (600-½)	680-2 644 (700-2)	