


APP CRS	Rwy Ldg	5320
046°	TDZE	16
	Apt Elev	17

RNAV (RNP) Z RWY 5

SOUTHWEST OREGON RGNL (OTH)

RNP AR APCH. RF required.		MALSR	MISSED APPROACH: Climb to 3300 on track 046° to EJLEL, left turn to ERQAS, and on track 138° to OTH VOR/DME and hold. * Missed approach requires minimum climb of 400 feet per NM to 1200. # Missed approach requires minimum climb of 255 feet per NM to 2400.
▼ For inop ALS, increase *RNP 0.11 all Cats visibility to 1 SM, #RNP 0.30 all Cats visibility to 1½ SM, and RNP 0.30 all Cats visibility to 1½ SM. For uncompensated Baro-VNAV systems, procedure NA below -2°C or above 54°C.			
AWOS-3PT	SEATTLE CENTER	NORTH BEND TOWER*	GND CON
135.075	127.55 254.35	118.45 (CTAF) 0	127.1

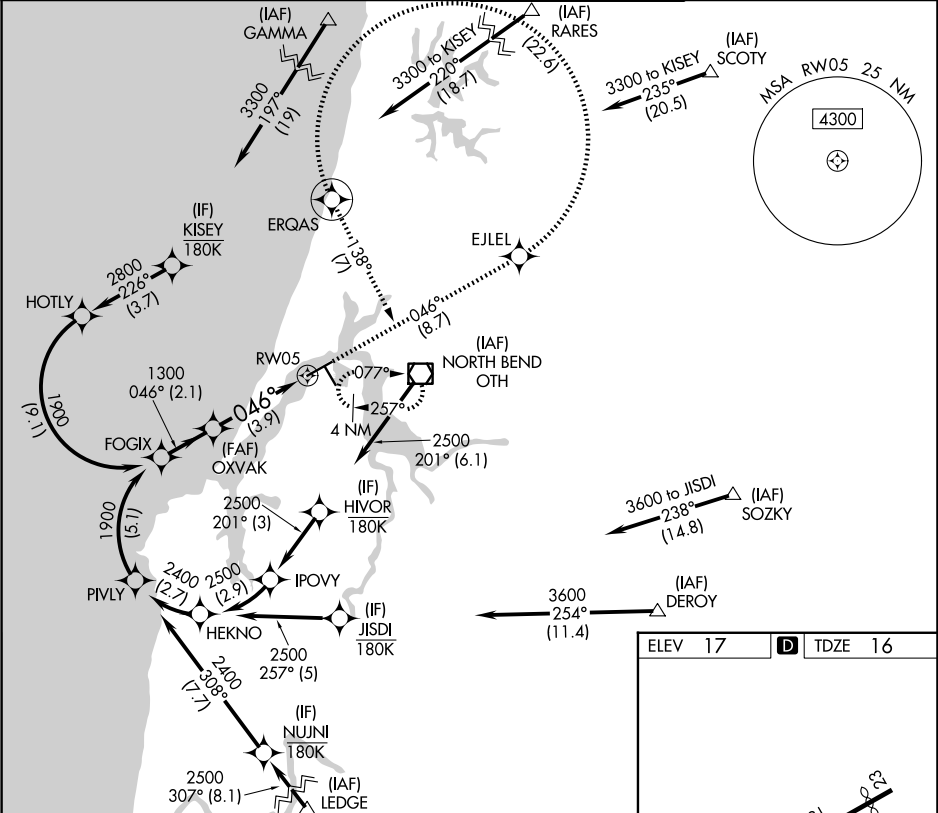

See planview for multiple IF locations.		3300	EJLEL	ERQAS	tr 138°	OTH
FOGIX		tr 046°				
1900		1300				
GP 3.00°						
TCH 51						
2.1 NM		3.9 NM				
CATEGORY	A	B	C	D		
RNP 0.11 DA*		394-5½	378 (400-½)			
RNP 0.30 DA#		477-1½	461 (500-1½)			
RNP 0.30 DA		569-1½	553 (600-1½)			
AUTHORIZATION REQUIRED						

HIRL Rwy 5-23

MIRL Rwy 13-31

REIL Rwys 13, 23 and 31