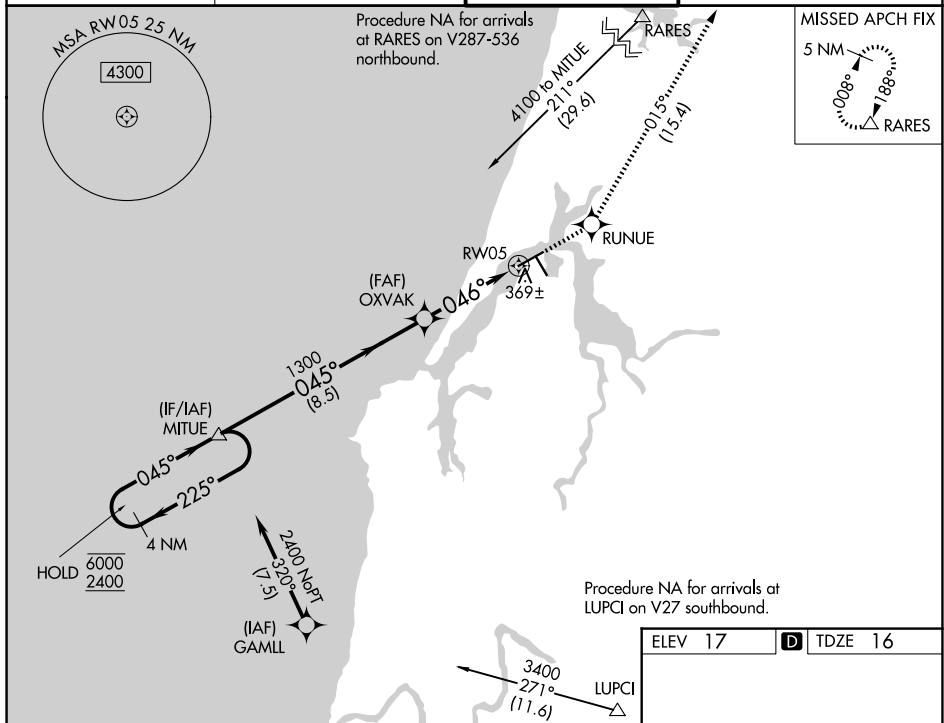


WAAS CH 82416 W05A	APP CRS 046°	Rwy Ldg 5320 TDZE 16 Apt Elev 17
--	------------------------	---

RNAV (GPS) Y RWY 5
SOUTHWEST OREGON RGNL (OTH)

RNP APCH.  Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. For inop ALS, increase LPV all Cats visibility to 7% SM, LNAV/VNAV all Cats visibility to 1½ SM, and increase LNAV Cat C/D visibility to 1¾ SM.	MALSR 	MISSED APPROACH: Climb to 6000 direct RUNWEE and on track 015° to RARES and hold, continue climb-in-hold to 6000.
---	---	---

AWOS-3PT 135.075	SEATTLE CENTER 127.55 254.35	NORTH BEND TOWER★ 118.45 (CTAF)0	GND CON 127.1
----------------------------	--	--	-------------------------

[illegible]

CATEGORY	A	B	C	D
LPV DA	319-1/2 303 (400-1/2)			
RNAV/ VNAV DA	550-1 3/8 534 (600-1 3/8)			
RNAV MDA	620-1/2 604 (700-1/2)		620-1 3/8 604 (700-1 3/8)	
CIRCLING	680-1 663 (700-1)	820-1 803 (900-1)	1100-3 1083 (1100-3)	1160-3 1143 (1200-3)

