


ILS or LOC RWY 24
CUYAHOGA COUNTY (CGF)

MALSR
A5


MISSED APPROACH: Climb to 1600 then climbing left turn to 3100 on CXR VOR/DME R-286 to CXR VOR/DME and hold.

T Autopilot coupled approach NA below 1513.
A Rwy 24 helicopter visibility reduction below $\frac{3}{4}$ SM NA.
 For inop ALS increase S-LOC Cats C/D to 1 SM.

D-ATIS 119.95	CLEVELAND APP CON 125.35 346.325	COUNTY TOWER★ 118.5 (CTAF) 0	GND CON 121.85	CLNIC DEL 121.85 (when tower closed)
-------------------------	--	--	--------------------------	---

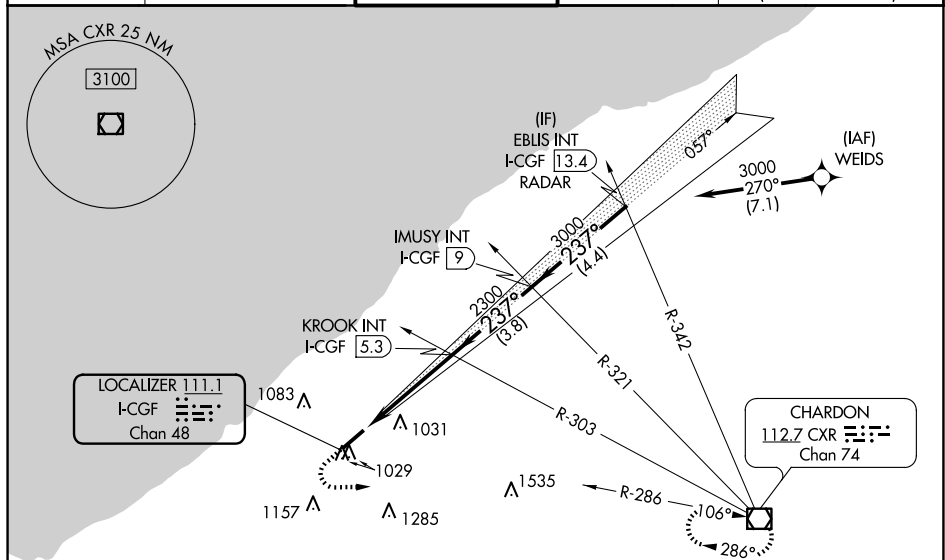

ELEV 876	D	TDZE 873
----------	----------	----------

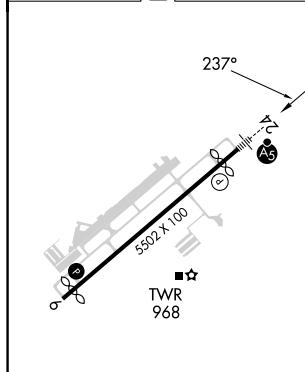

REIL Rwy 6 **L**
HIRL Rwy 6-24 **L**

FAF to MAP 4.3 NM					
Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

1600 ↑	3100 ↖	CXR R-286	CXR ☐	KROOK INT I-CGF 5.3	IMUSY INT I-CGF 9	EBLIS INT I-CGF 13.4 RADAR
CATEGORY	A	B	C	D		
S-ILS 24	1073-½		200 (200-½)			
S-LOC 24	1240-½	367 (400-½)	1240-⅝	367 (400-⅝)		
C CIRCLING	1400-1 524 (600-1)	1500-1 624 (700-1)	1560-2 684 (700-2)	1620-2½ 744 (800-2½)		