

APP CRS 191°	Rwy Ldg 11089 TDZE 272 Apt Elev 312
------------------------	--

RNAV (RNP) Z RWY 19C
WASHINGTON DULLES INTL (IAD)

RNP AR APCH - GPS.


T For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 visibility all Cats to RVR 4500, and RNP 0.25 visibility all Cats to RVR 5500.

ALSF-2



MISSED APPROACH: Climb to 3000 direct MOOOV and hold.

D-ATIS	POTOMAC APP CON	DULLES TOWER	GND CON
134.85	120.45 306.925 (241°-330°) 128.525 306.925 (091°-240°) 126.1 338.25 (331°-090°)	120.1 317.8 (Rwy 1R/19L) 120.25 348.6 (Rwy 1C/19C) 134.425 348.6 (Rwys 1L/19R and 12/30)	121.9 317.8 (EAST) 121.625 348.6 (WEST)

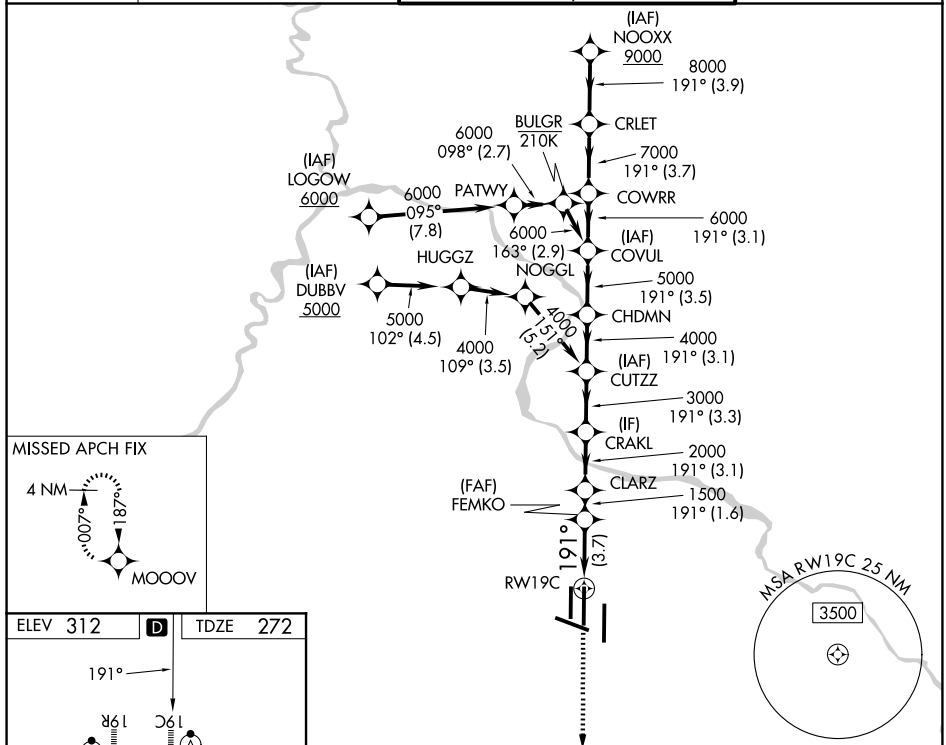

3000 MOO O V VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 72).

NOOXX CRLET

191 9000

FEMKO CLARZ CRAKL CUTZZ CHDMN COVUL COWRR

1500 2000 3000 4000 5000 6000 7000 8000

GP 3.00° TCH 54

3.7 NM 1.6 NM 3.1 NM 3.3 NM 3.1 NM 3.5 NM 3.1 NM 3.7 NM 3.9 NM

CATEGORY	A	B	C	D
RNP 0.11 DA		554/24	282 (300-½)	
RNP 0.25 DA		624/30	352 (400-¾)	
RNP 0.30 DA		702/40	430 (400-¾)	

AUTHORIZATION REQUIRED

WASHINGTON, DC
Amdt 1 16MAY24

38°57'N-77°28'W

WASHINGTON DULLES INTL (IAD)
RNAV (RNP) Z RWY 19C

NE-3, 22 JAN 2026 to 19 FEB 2026