

WAAS CH 57930 W22A	APP CRS 220°	Rwy Idg TDZE 1171 Apt Elev 1171
--	------------------------	---


RNAV (GPS) RWY 22
IOWA COUNTY (MRJ)

RNP APCH - GPS.

⚠ Baro-VNAV and VDP NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 22 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Platteville altimeter setting and increase LPV DA to 1476 feet, increase LNAV/VNAV DA to 1534 feet, increase all MDAs 60 feet, and LNAV visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 3500 direct ZUPOV and hold.

AWOS-3 118.525	CHICAGO CENTER 133.95 281.4	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

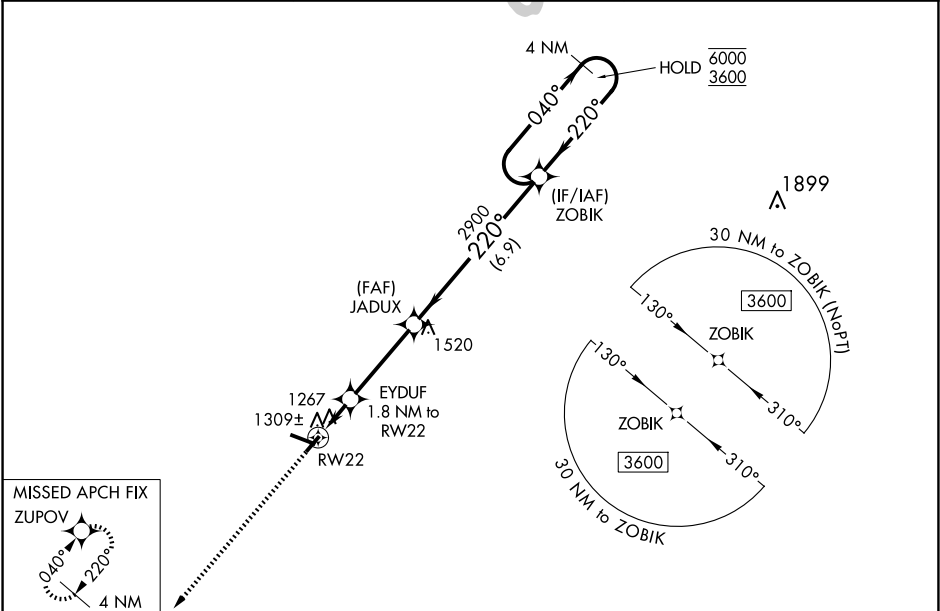

ELEV 1171	TDZE 1171
------------------	------------------

3500 **ZUPOV** **VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).** **4 NM Holding Pattern**

GP 3.00° TCH 40

1780 **2900** **6000** **3600**

1.2 NM to RW22 **1.8 NM to RW22** **3.5 NM** **6.9 NM**

0.7% UP **5001 X 75** **3600 X 60 29**

CATEGORY	A	B	C	D
LPV DA	1421-1 250 (300-1)			NA
LNAV/VNAV DA	1479-1 308 (400-1)			NA
LNAV MDA	1580-1	409 (500-1)	1580-1½ 409 (500-1½)	NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1½ 469 (500-1½)	NA

EC-3, 22 JAN 2026 to 19 FEB 2026

EC-3, 22 JAN 2026 to 19 FEB 2026