

WAAS CH 45633 W34A	APP CRS 344°	Rwy Ldg TDZE Apt Elev	4500 1304 1304
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 34



DODGE CENTER (TOB)

⚠

Baro-VNAV NA when using Rochester Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rochester Intl altimeter setting and increase all DA 39 feet and all MDA 40 feet, and increase LNAV Cat C visibility ½ mile and Circling Cat C visibility ¼ mile. Rwy 34 Straight-in and Circling minimums NA at night.

MISSED APPROACH: Climb to 3000 direct JOPSU and hold.

AWOS-3PT 119.075	ROCHESTER APP CON ★ 119.8 251.125	CTAF 122.9 
----------------------------	---	--

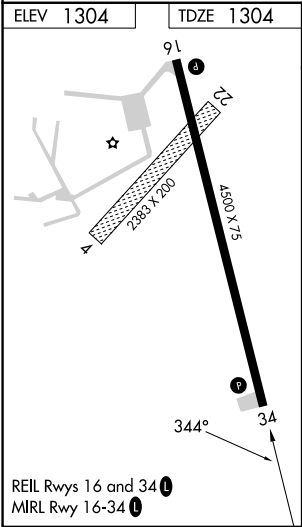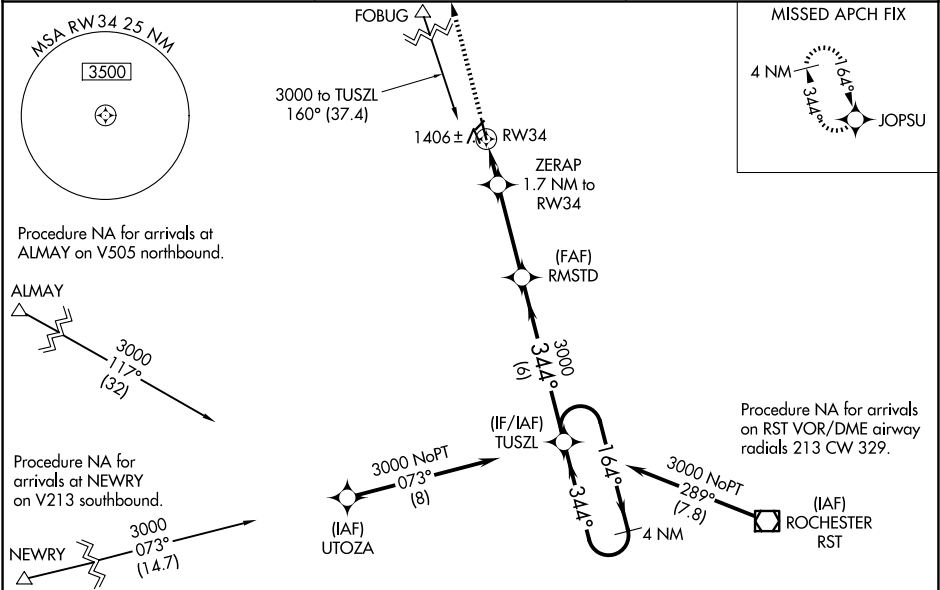

3000	JOPSU	RMSTD	TUSZL	4 NM Holding Pattern
* LNAV only.	ZERAP 1.7 NM to RW34	3000	344°	164° → 3000
RW34	1880*	3000	344°	GP 3.00° TCH 40
1.7 NM	3.5 NM	6 NM		
CATEGORY	A	B	C	D
LPV DA	1554-1	250 (300-1)		NA
LNAV/VNAV DA	1556-1	252 (300-1)		NA
LNAV MDA	1660-1	356 (400-1)		NA
CIRCLING	1960-1	656 (700-1)	1960-1¾ 656 (700-1¾)	NA