


ICONS FIVE DEPARTURE (RNAV)


CONCORD-PADGETT RGNL (JQF)
CONCORD, NORTH CAROLINA

CHARLOTTE DEP CON
128.325 307.8
ATIS
133.675
CLNC DEL
118.55
CLNC DEL (when twr closed)
127.25
GND CON
121.85
CONCORD TOWER*
134.65
UNICOM
122.95

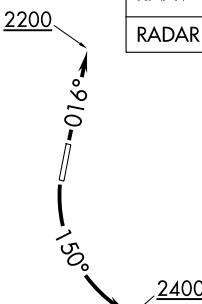


RNAV - 1 DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE:
3000

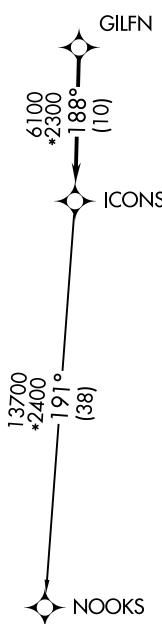**TAKEOFF MINIMUMS**

Rwy 2: Standard.
Rwy 20: Standard with minimum climb of 320' per NM to 2400.

NOTE: For turbojets only.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.

**DEPARTURE ROUTE DESCRIPTION**

TAKEOFF RUNWAY 2: Climb on heading 016° to 2200, then on heading assigned by ATC, thence. . . .

TAKEOFF RUNWAY 20: Climbing left turn heading 150° to 2400, then on heading assigned by ATC, thence. . . .

. . . . on RADAR vectors to GILFN, then on track 188° to ICONS. Then on NOOKS Transition. Maintain 3000, expect filed altitude within 10 minutes after departure.

NOOKS TRANSITION (ICONS5.NOOKS)