

RNAV (RNP) Z RWY 28R

JOHN GLENN COLUMBUS INTL (CMH)


| | | |
|-------------|----------|-------------|
| APP CRS | Rwy Ldg | 8000 |
| 281° | TDZE | 813 |
| | Apt Elev | 815 |

RNP AR APCH. MALSR 


For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.16 all Cats visibility to RVR 4500 and increase RNP 0.30 all Cats visibility to RVR 5500. Simultaneous approach authorized.

MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 to APE VORTAC and hold.

| | | | |
|------------------------|-------------------------------------------|--------------------------------------|-------------------------------|
| D-ATIS 124.6 | COLUMBUS APP CON 125.95 371.975 | COLUMBUS TOWER 132.7 257.8 | GND CON 121.9 348.6 |
|------------------------|-------------------------------------------|--------------------------------------|-------------------------------|

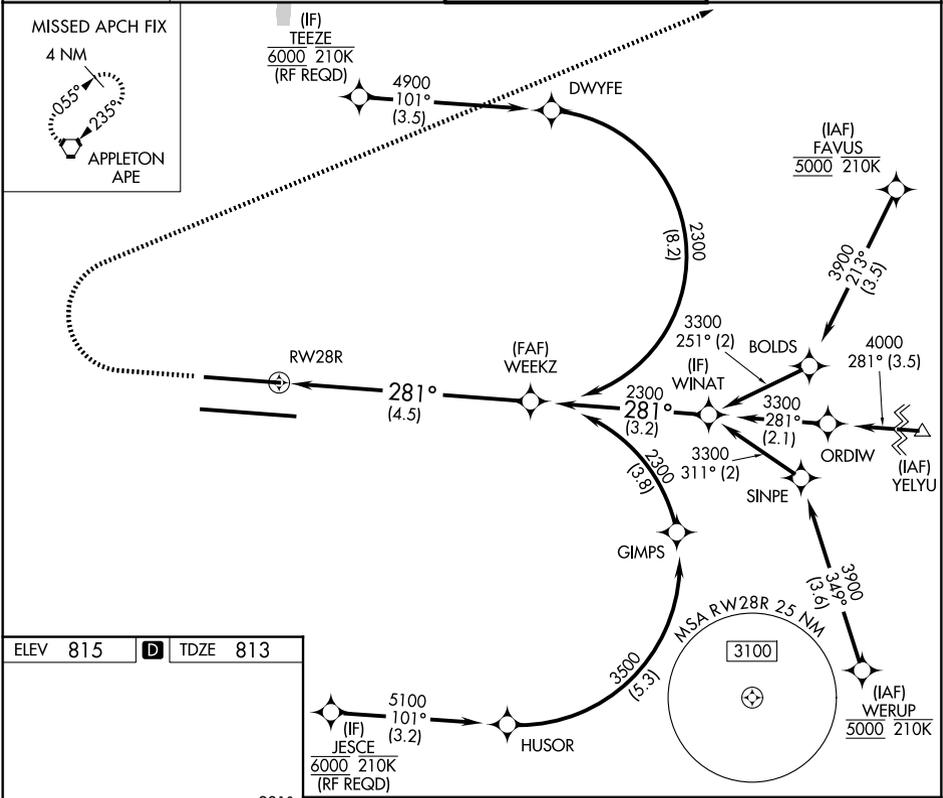

| | | |
|----------|----------|----------|
| ELEV 815 | D | TDZE 813 |
|----------|----------|----------|

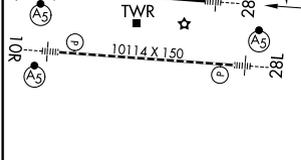

See planview for multiple IF locations.

WEEKZ 2300

RWY 28R 2300

GP 3.00° TCH 50

| | | | | |
|-------------|---------|-------------|---|---|
| CATEGORY | A | B | C | D |
| RNP 0.16 DA | 1129/24 | 316 (400-½) | | |
| RNP 0.30 DA | 1185/35 | 372 (400-¾) | | |

TDZL/RCLS Rwy 10R-28L
HIRL Rwy 10R-28L and 10L-28R

AUTHORIZATION REQUIRED

EC-2, 19 MAR 2026 to 16 APR 2026

EC-2, 19 MAR 2026 to 16 APR 2026