

APP CRS	Rwy Ldg	<b>9025</b>
<b>085°</b>	TDZE	<b>3940</b>
	Apt Elev	<b>3962</b>

# RNAV (RNP) Y RWY 8R

EL PASO INTL (ELP)


RNP AR APCH.  
RF required.

**T** For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.

ASR

MISSED APPROACH: Climb to 4400 then climbing right turn to 7500 direct FABAN and hold.



D-ATIS	EL PASO APP CON	EL PASO TOWER	GND CON	CLNC DEL
<b>120.0 254.3</b>	<b>124.25 298.85</b>	<b>118.3 239.275</b>	<b>121.9 348.6</b>	<b>125.0 379.1</b>

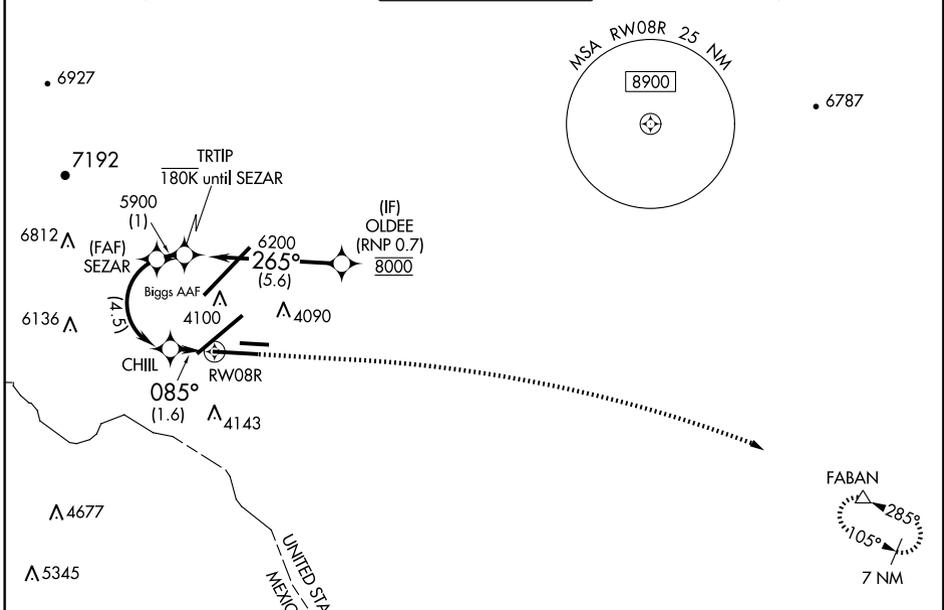

SC-3, 19 MAR 2026 to 16 APR 2026

SC-3, 19 MAR 2026 to 16 APR 2026

ELEV	3962	<b>D</b>	TDZE	3940
------	------	----------	------	------

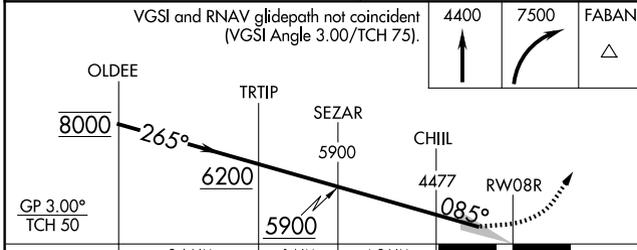

CATEGORY	A	B	C	D
RNP 0.20 DA		4193- <sup>3</sup> / <sub>4</sub>	253 (300- <sup>3</sup> / <sub>4</sub> )	
RNP 0.30 DA		4234- <sup>7</sup> / <sub>8</sub>	294 (300- <sup>7</sup> / <sub>8</sub> )	
<b>AUTHORIZATION REQUIRED</b>				

MIRL Rwy 8L-26R  
HIRL Rwy 4-22 and 8R-26L  
REIL Rwy 4 and 8R