



EC-1, 19 MAR 2026 to 16 APR 2026

RNAV-1 DME/DME/IRU or GPS.	<b>TOP ALTITUDE:</b>
RADAR required.	<b>ASSIGNED BY ATC</b>



SELFRIDGE DEP CON ★  
 119.6 391.9  
 ATIS  
 125.325 270.1  
 CLNC DEL  
 128.3 275.8  
 GND CON  
 128.3 275.8  
 SELFRIDGE TOWER ★  
 120.15 225.4

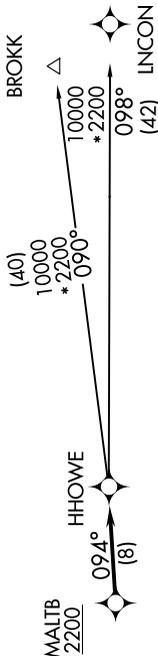

**TAKEOFF MINIMUMS:**  
 Rwy 1: Standard.  
 Rwy 19: Standard with minimum climb of 235' per NM to 1500.

**NOTE:** Turbojet departures at /above 10000, maintain 280K until advised by ATC.  
**NOTE:** BROKK TRANSITION: For use by flights filed at or below FL270, or as assigned by ATC.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

**TAKEOFF RUNWAY 1:** Climb on heading 007° or as assigned by ATC, thence....  
**TAKEOFF RUNWAY 19:** Climb on heading 187° or as assigned by ATC, thence....

....for RADAR vectors to cross MALTB at or above 2200, then on track 094° to HOWE, then on (transition).  
 Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

**BROKK TRANSITION (HOWE4, BROKK):**  
**LINCON TRANSITION (HOWE4, LINCON):**

EC-1, 19 MAR 2026 to 16 APR 2026