

ILS or LOC RWY 4

| | | |
|---------------------------|-------------------------|---|
| LOC I-GLO 108.5 | APCH CRS 038° | Rwy Idg 10,001 TDZE 4284 Arprt Elev 4295 |
|---------------------------|-------------------------|---|

[USAF]

CANNON AFB (KCVS)

ATC RADAR or DME required. Missed approach requires use of RNAV or ATC RADAR monitoring.





MISSED APPROACH: Climb to 6000 out CVS TACAN R-036 to 5 DME (FETEP) turning left climb to 7000 intcp CVS R-003 to 12 DME (HEDOB) and hold.



*When ALS inop, increase all CAT RVR to 40 and vis to 3/4 miles.

| | | | | |
|----------------------------|---------------------------------|------------------------------|-------------------------------|----------------------------------|
| ATIS 119.1 269.9 | APP CON 118.425 352.1 | TOWER 120.4 270.25 | GND CON 121.9 275.8 | CLNC DEL 120.2 293.225 |
|----------------------------|---------------------------------|------------------------------|-------------------------------|----------------------------------|

**When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE RVR to 60 and vis to 1 1/2 miles.

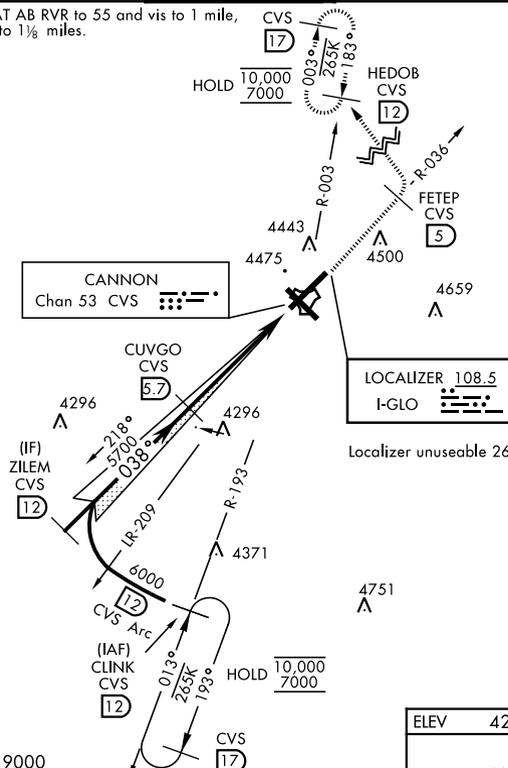

EMERG SAFE ALT 100 NM 9000

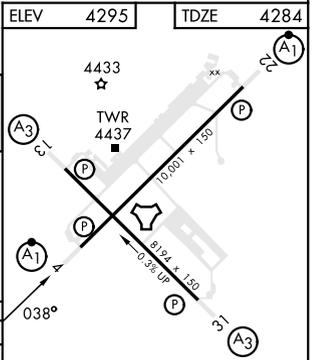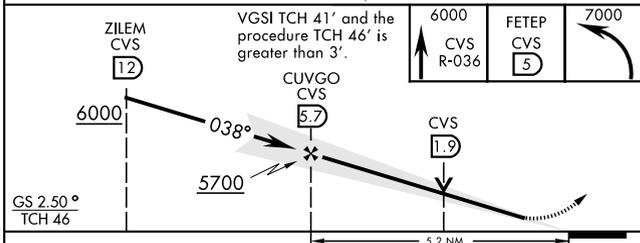

| CATEGORY | A | B | C | D | E |
|------------|---------|---------------|-----------------|-----------------|-----------------|
| S-ILS 4 * | 4484/24 | | 200 | (200-1/2) | |
| S-LOC 4 ** | 4680/24 | 396 (400-1/2) | 4680/35 | 396 (400-3/4) | |
| CIRCLING | 4840-1 | 545 (600-1) | 4860-1 1/2 | 5000-2 1/4 | 5020-2 1/2 |
| | | | 565 (600-1 1/2) | 705 (800-2 1/4) | 725 (800-2 1/2) |

| HIRL all rwys | | | | | |
|-------------------|------|------|------|------|------|
| FAF to MAP 5.2 NM | | | | | |
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 5:12 | 3:28 | 2:36 | 2:05 | 1:44 |

ILS or LOC RWY 4

SW-1, 19 MAR 2026 to 16 APR 2026

SW-1, 19 MAR 2026 to 16 APR 2026