


PRESCOTT THREE DEPARTURE (OBSTACLE) AL-546 (FAA)

PRESCOTT, ARIZONA

PHOENIX DEP CON  
133.575 281.55  
ALBUQUERQUE CENTER  
128.45 298.9  
ATIS  
127.2  
CLNC DEL  
119.25  
GND CON  
121.7  
PRESCOTT TOWER\*  
125.3 (CTAF) 257.9

DRAKE  
114.1 DRK  
Chan 88

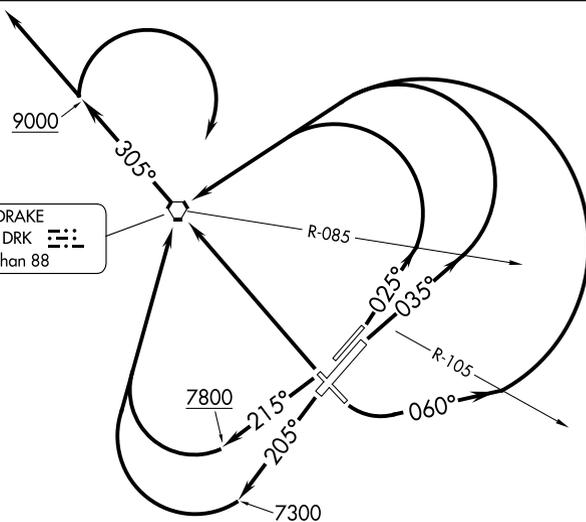

TAKEOFF MINIMUMS

Rwys 3L/R, 30: Standard.

Rwy 12: Standard with a minimum climb of 260' per NM to 5700 or 600-2¾ with a minimum climb of 245' per NM to 5600 or 1800-3 for VCOA.

Rwy 21L: Standard with a minimum climb of 430' per NM to 8200 or 1800-3 for VCOA.

Rwy 21R: Standard with a minimum climb of 500' per NM to 8800 or 1800-3 for VCOA.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 3L: Climb heading 025° until crossing DRK VORTAC R-085, then climbing left turn direct DRK VORTAC, thence. . . .

TAKEOFF RUNWAY 3R: Climb heading 035° until crossing DRK VORTAC R-085, then climbing left turn direct DRK VORTAC, thence. . . .

TAKEOFF RUNWAY 12: Climbing left turn heading 060° until crossing DRK VORTAC R-105, then climbing left turn direct DRK VORTAC, thence. . . .

TAKEOFF RUNWAY 21L: Climb heading 205° until 7300, then climbing right turn direct DRK VORTAC, thence. . . .

TAKEOFF RUNWAY 21R: Climb heading 215° until 7800, then climbing right turn direct DRK VORTAC, thence. . . .

TAKEOFF RUNWAY 30: Climb direct DRK VORTAC, thence. . . .

. . . .climb on DRK VORTAC R-305 to 9000. Aircraft departing on DRK VORTAC R-305 continue climbing on course. All other aircraft climbing right turn direct DRK VORTAC then on assigned course.

VCOA RUNWAYS 12, 21L/R: Obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross Prescott Airport at or above 6700 direct DRK VORTAC, then climb on DRK VORTAC R-305 to 9000. Aircraft departing on DRK VORTAC R-305 continue climbing on course. All other aircraft climbing right turn direct DRK VORTAC then on assigned course.

SW-4, 19 MAR 2026 to 16 APR 2026

SW-4, 19 MAR 2026 to 16 APR 2026