

WAAS CH 40019 W22B	APP CRS 224°	Rwy Ldg 7795 TDZE 13 Apt Elev 13
--	------------------------	---

RNAV (GPS) RWY 22R


JOHN F KENNEDY INTL (JFK)

RNP APCH.





Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.

MISSED APPROACH:
Climb to 4000 direct
PIDTO and on track 236°
to COL VOR/DME and hold.

(SW)	D-ATIS (NE)	NEW YORK APP CON	KENNEDY TOWER	GND CON
115.4	117.7 128.725	128.125 269.0	119.1 281.55 (4R/22L and 13L/31R) 123.9 281.55 (4L/22R and 13R/31L)	121.9 348.6

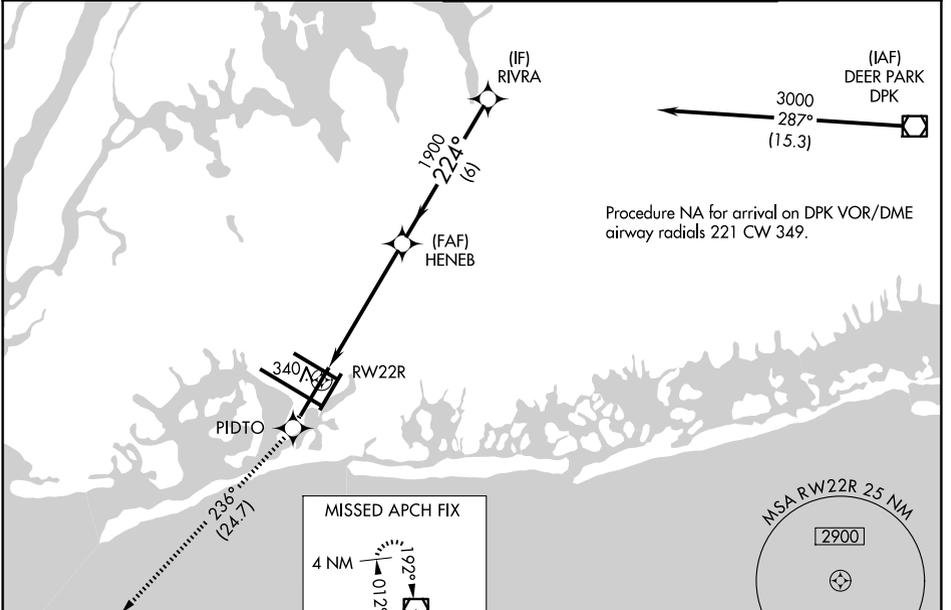

ELEV 13	D	TDZE 13
---------	----------	---------

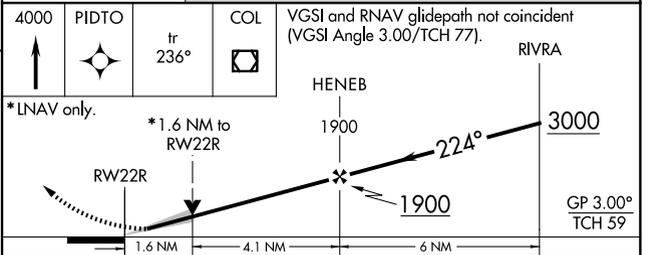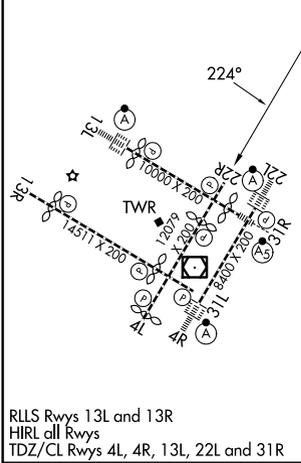

CATEGORY	A	B	C	D
LPV DA		269/40	256 (300-¾)	
LNAV/VNAV DA		501-1½	488 (500-1½)	
LNAV MDA	600/55	587 (600-1)	600-1¾	587 (600-1¾)
CIRCLING	640-1	627 (700-1)	680-1¾ 667 (700-1¾)	680-2 667 (700-2)

NEW YORK, NEW YORK
Amdt 1G 21MAY20

40°38'N-73°47'W

RNAV (GPS) RWY 22R

JOHN F KENNEDY INTL (JFK)

NE-2, 19 MAR 2026 to 16 APR 2026

NE-2, 19 MAR 2026 to 16 APR 2026