HOPKINSVILLE, KENTUCKY

ILS or LOC RWY 23

LOC/DME I-FKP	APCH CRS	Rwy ldg 10,926
111.9	225°	TDZE 571
Chan 56		Arpt Elev 571

[USA] CAMPBELL AAF (FORT CAMPBELL) (KHOP)

RADAR required

T *When ALS inop, increase RVR to 40, vis to ¾ miles.
**When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1⅛ miles.
***Circling not authorized SE of Rwy 5-23.

SSALR A3

MISSED APPROACH: Climb to 1200 then climbing right turn to 2500 direct AIRBE LOM/I-FKP 6.5 DME, continue climb-in-hold to 2500 (max 230 KIAS).

ATIS	APP CON	TOWER	GND CON	ASR/PAR
125.175 308.4	118.1 269.525	120.9 278.8	121.8 266.8	

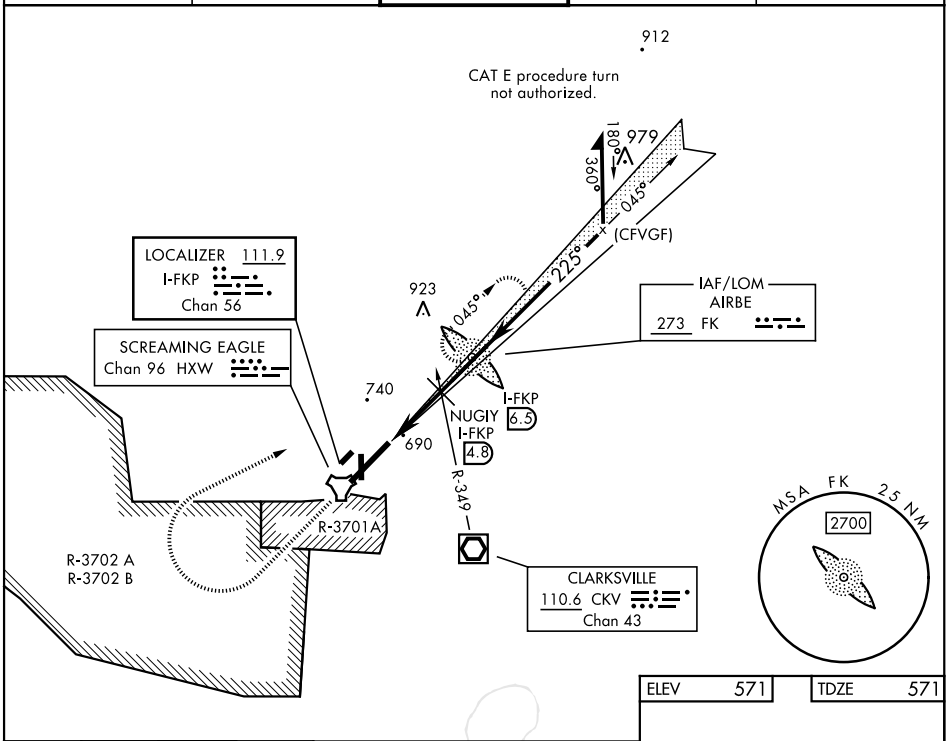

ELEV	571	TDZE	571

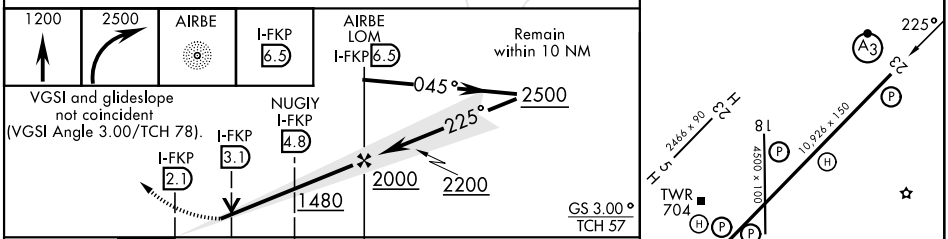

HIRL all rwys

CATEGORY	A	B	C	D	E
S-ILS 23*	771/24 200 (200-½)				
S-LOC 23**	960/24 389 (400-½)		960/35 389 (400-⅝)		
CIRCLING***	1060-1 489 (500-1)		1060-1½ 489 (500-1½)	1140-2 569 (600-2)	

FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026