


LOC/DME I-UGY <b>109.7</b> Chan <b>34</b>	APP CRS <b>274°</b>	Rwy Ldg <b>9501</b> TDZE <b>1027</b> Apt Elev <b>1027</b>
---	------------------------	---

# ILS or LOC RWY 27

KANSAS CITY INTL (MCI)

RNP APCH - GPS. From DMANN or SAWKY or MURPE or TADAE. DME or RADAR required.	MALSR	MISSED APPROACH: Climb to 1600 then climbing left turn to 4000 on heading 230° and MCI R-223 to RUGBB INT/MCI 25 DME and hold.
▼ For inop ALS, increase S-ILS 27 Cat E visibility to RVR 4000 and S-LOC 27 Cat C/D/E visibility to RVR 5500. *RVR 1800 authorized with use of FD or AP or HUD to DA.		

D-ATIS <b>128.375</b>	KANSAS CITY APP CON <b>120.95 318.1</b>	INTERNATIONAL TOWER <b>128.2 254.25</b>	GND CON <b>121.8</b>	CLNC DEL <b>135.7</b>	CPDLC
--------------------------	--	--	-------------------------	--------------------------	-------

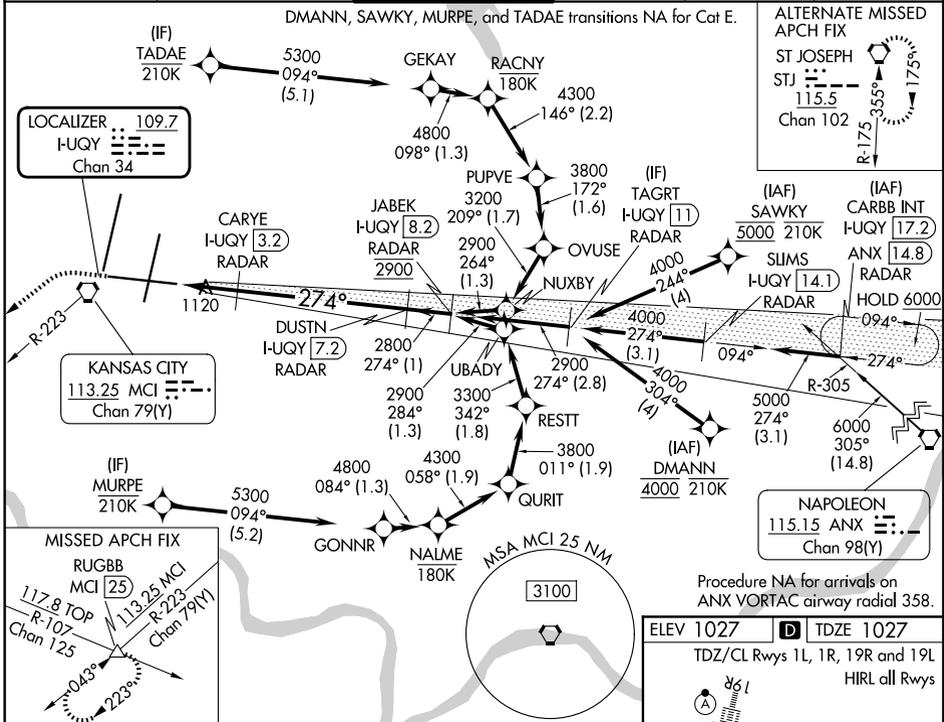


ALTERNATE MISSED APCH FIX  
ST JOSEPH  
STJ  
115.5  
Chan 102

NAPOLEON  
115.15 ANX  
Chan 98(Y)


NC-3, 19 MAR 2026 to 16 APR 2026

NC-3, 19 MAR 2026 to 16 APR 2026

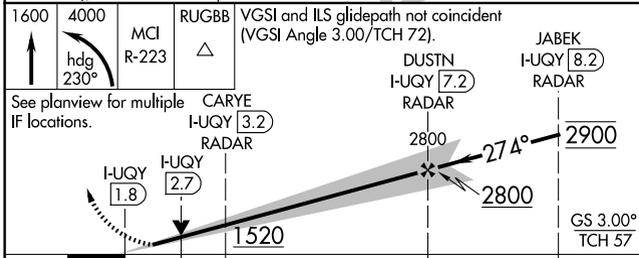

ELEV 1027	TDZE 1027
-----------	-----------

TDZ/CL Rwy's 1L, 1R, 19R and 19L  
HIRL all Rwy's

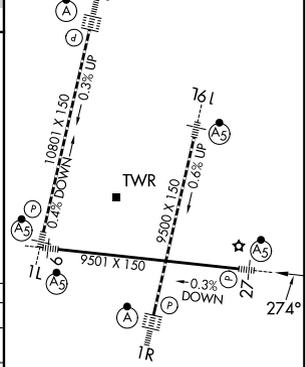

CATEGORY	A	B	C	D	E
S-ILS 27*	1227/24 200 (200-½)				
S-LOC 27	1380/24	353 (400-½)	1380/30		353 (400-¾)
CIRCLING	1540-1	513 (600-1)	1540-1½	1580-2	553 (600-2)

FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48