

# RNAV (RNP) Z RWY 9

KANSAS CITY INTL (MCI)

|             |          |             |
|-------------|----------|-------------|
| APP CRS     | Rwy Ldg  | <b>9501</b> |
| <b>094°</b> | TDZE     | <b>1016</b> |
|             | Apt Elev | <b>1027</b> |


RNP AR APCH - GPS.

▼ For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 4500; increase RNP 0.30 all Cats visibility to RVR 6000.

MALSR 

MISSED APPROACH: Climb to 4000 direct DUSTN and on track 092° LYMES and hold.



|                          |  |  |                         |                          |       |
|--------------------------|--|--|-------------------------|--------------------------|-------|
| D-ATIS<br><b>128.375</b> | KANSAS CITY APP CON<br><b>120.95 318.1</b> | INTERNATIONAL TOWER<br><b>128.2 254.25</b> | GND CON<br><b>121.8</b> | CLNC DEL<br><b>135.7</b> | CPDLC |
|--------------------------|--|--|-------------------------|--------------------------|-------|

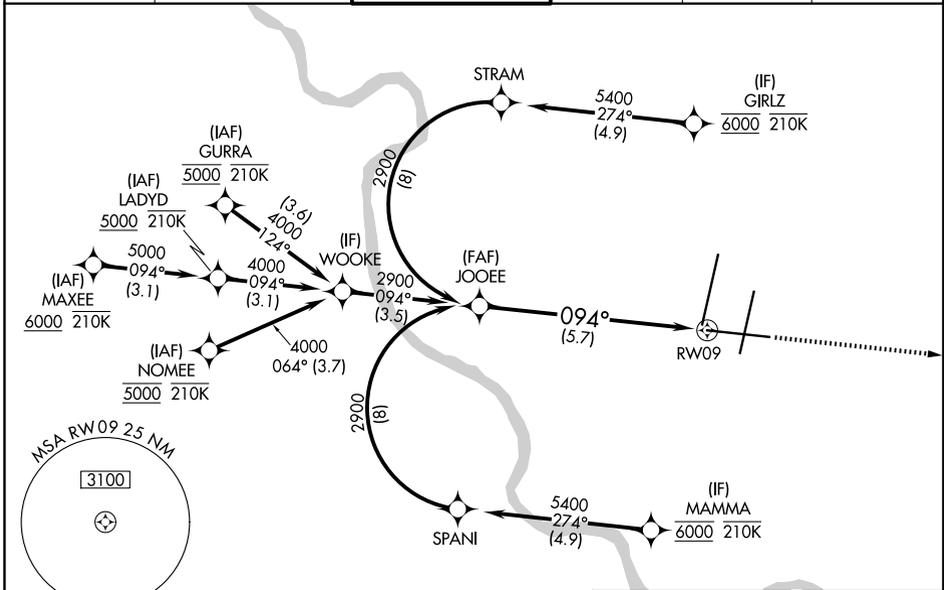

NC-3, 19 MAR 2026 to 16 APR 2026

NC-3, 19 MAR 2026 to 16 APR 2026

|           |          |           |
|-----------|----------|-----------|
| ELEV 1027 | <b>D</b> | TDZE 1016 |
|-----------|----------|-----------|

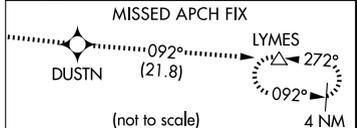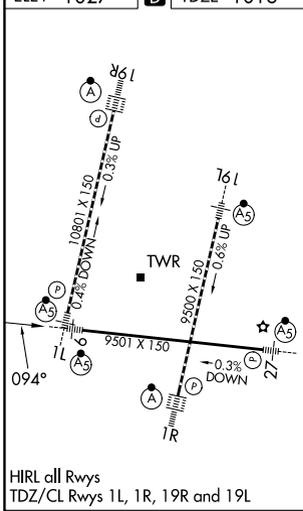

|   |   |       |         |       |
|---|---|-------|---------|-------|
| JOOEE<br>2900<br>GP 3.00°<br>TCH 56<br>5.7 NM<br>RWY 09 | 4000                                    | DUSTN | tr 092° | LYMES |
|   | See planview for multiple IF locations. |       |         |       |
| CATEGORY  | A                                       | B     | C       | D     |
| RNP 0.20 DA   | 1319/24 303 (300-½)                     |       |         |       |
| RNP 0.30 DA   | 1418/40 402 (400-¾)                     |       |         |       |
| <b>AUTHORIZATION REQUIRED</b>                           |   |       |         |       |