




WAAS CH <b>42720</b> W01A	APP CRS <b>008°</b>	Rwy Ldg TDZE Apt Elev	<b>8199</b> <b>729</b> <b>742</b>
---------------------------------	------------------------	-----------------------------	---

# RNAV (GPS) RWY 1


CHICAGO/ROCKFORD INTL (RFD)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 2500 direct WAGET and hold.
<p>For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. For inop ALS, increase LNAV Cats C and D visibility to RVR 6000. *RVR 1800 authorized with use of FD or AP or HUD to DA.</p>		

ATIS <b>127.6</b>	ROCKFORD APP CON <b>121.0 327.0</b>	ROCKFORD TOWER <b>118.1 290.375</b>	GND CON <b>121.9 290.375</b>
----------------------	--	--	---------------------------------

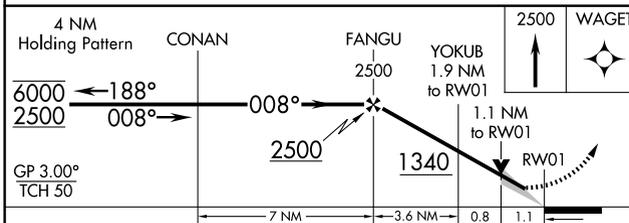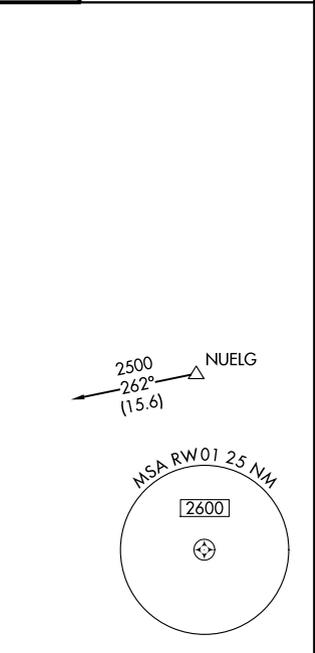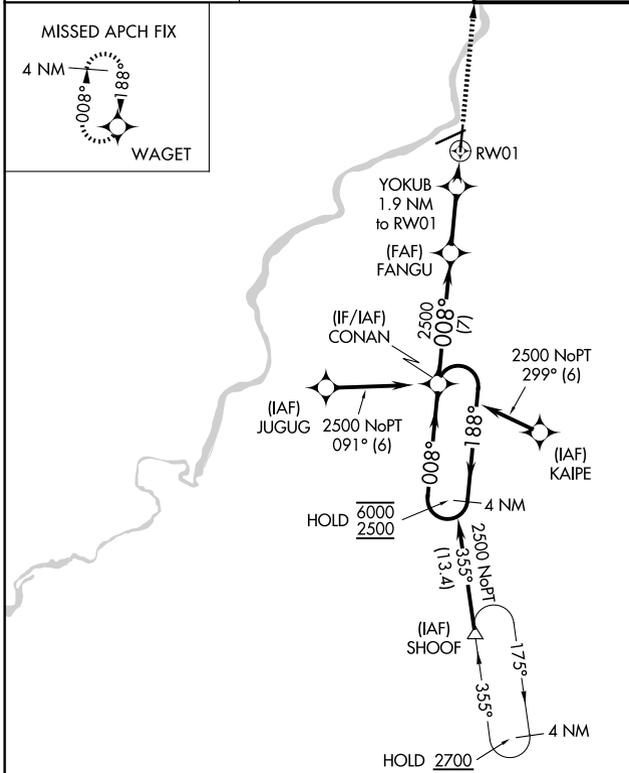

ELEV 742	<b>D</b> TDZE 729
REIL Rwy 19 and 25	
HIRL Rwy 1-19 and 7-25	
TDZ/CL Rwy 1 and 7	

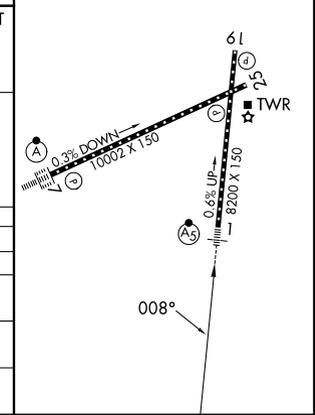

CATEGORY	A	B	C	D
LPV DA*		929/24	200 (200-½)	
LNAV/VNAV DA		1200/60	471 (500-1¼)	
LNAV MDA	1120/24	391 (400-½)	1120/35	391 (400-¾)
CIRCLING	1220-1 478 (500-1)	1280-1 538 (600-1)	1320-1½ 578 (600-1½)	1460-2¼ 718 (800-2¼)

EC-3, 19 MAR 2026 to 16 APR 2026

EC-3, 19 MAR 2026 to 16 APR 2026