

LOC I-RHI 111.3	APP CRS 091°	Rwy Ldg 6799
		TDZE 1623
		Apt Elev 1623

ILS or LOC RWY 9

RHINELANDER/ONEIDA COUNTY (RHI)


ADF or DME required.

MAISR 

MISSED APPROACH:
Climb to 2100 then climbing right turn to 3500 direct ARSHA LOM/RHI VOR/DME 6.8 DME and hold, continue climb-in-hold to 3500.

NA ** DME from RHI VOR/DME.

ASOS 126.825	MINNEAPOLIS CENTER 133.65 281.5	UNICOM 123.0 (CTAF)
------------------------	---	-------------------------------

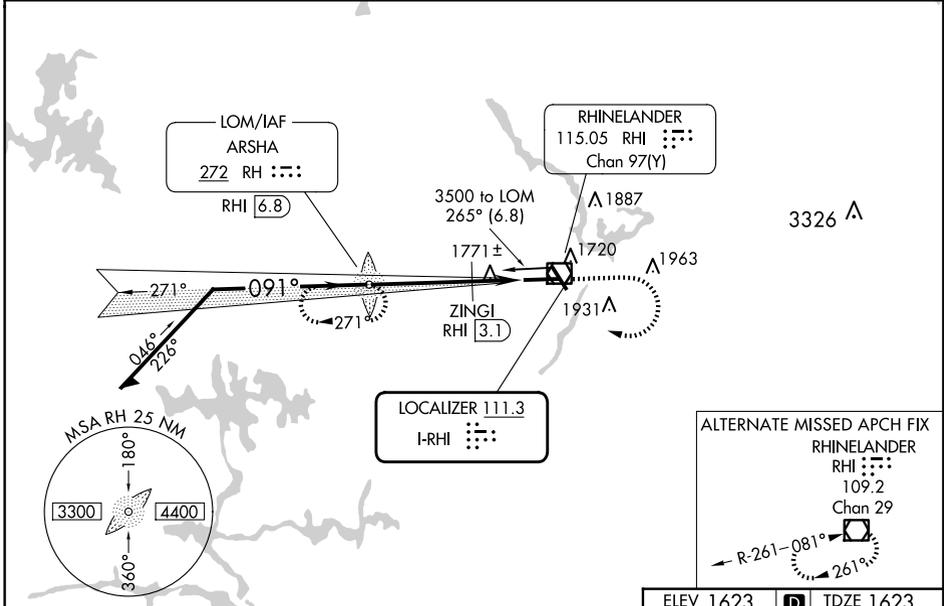

*2240 when using Tomahawk altimeter setting.

Remain within 10 NM

RH LOM RHI [6.8]

2100 3500 RH 

3500 271° 091° 3500

3477

ZINGI RHI [3.1]

*2180

3.7 NM 1.9 NM

GS 3.00° TCH 52

ELEV 1623	D	TDZE 1623
-----------	----------	-----------

CATEGORY	A	B	C	D
S-ILS 9	1823-½ 200 (200-½)			
S-LOC 9	2180-½	557 (600-½)	2180-1⅛	557 (600-1⅛)
C CIRCLING	2180-1 557 (600-1)	2260-1 637 (700-1)	2260-1¾ 637 (700-1¾)	2280-2 657 (700-2)
ZINGI FIX MINIMUMS**				
S-LOC 9	2040-½	417 (500-½)	2040-¾	417 (500-¾)
C CIRCLING	2100-1 477 (500-1)	2260-1 637 (700-1)	2260-1¾ 637 (700-1¾)	2280-2 657 (700-2)

Diagram details:

- 091°
- 6800 X 1.50
- 0.4% UP
- Altitudes: 3201, 3200, 3300
- Angles: 091°, 271°, 046°, 216°

HIRL Rwys 9-27 and 15-33	D
REIL Rwys 15, 27 and 33	D
FAF to MAP 5.6 NM	
Knots	60 90 120 150 180
Min:Sec	5:36 3:44 2:48 2:14 1:52

EC-3, 19 MAR 2026 to 16 APR 2026

EC-3, 19 MAR 2026 to 16 APR 2026