

FORT BELVOIR, VIRGINIA

ILS or LOC RWY 32

LOC/DME I-DAA 108.9 Chan 26	APCH CRS 322°	Rwy Ildg TDZE Arpt Elev 4529 68 74
---	-------------------------	--

[USA]

DAVISON AAF (KDAV)

RADAR required for procedure entry from DCA VOR.

- ▼ * When ALS inop, increase RVR to 45, vis to 7/8 mile.
- ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 1/8 miles.
- *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 1/8 miles.




MISSED APPROACH: Climb to 800, then climbing left turn to 3000 direct to HAXIL (DCA R-181/ 17.4 DME) and hold. Continue climb in hold to 3000.


ATIS 128.175	POTOMAC APP CON 118.95 319.1	TOWER ★ 124.275 (CTAF) 0 229.4	GND CON 121.9 351.8	CLNC DEL 351.8
------------------------	--	--	-------------------------------	--------------------------

† If local altimeter setting not received, use Ronald Reagan Washington National altimeter setting. 528

Visibility reduction by helicopters not authorized.

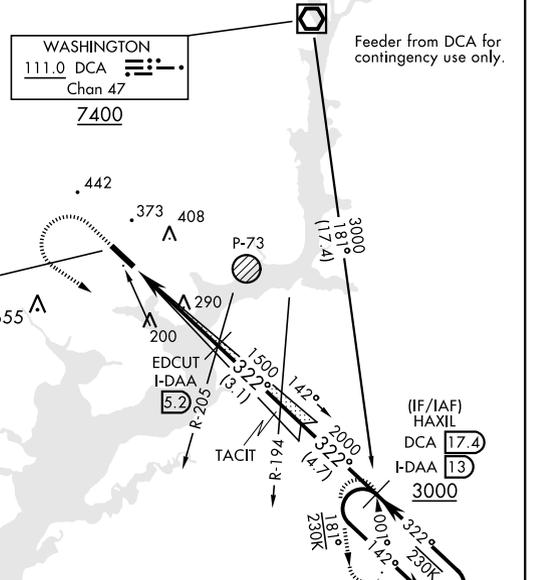


EMERG SAFE ALT 100 NM 5300

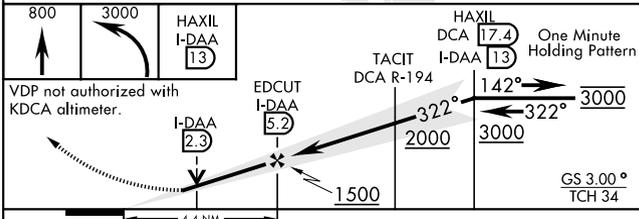

ELEV 74	TDZE 68
---------	---------

Rwy 14 Ildg 4930'
Rwy 32 Ildg 4529'

CATEGORY	A	B	C	D
S-ILS 32*	348/40 280		(300-3/4)	
S-LOC 32**	580/40	512 (600-3/4)	580-1 1/4	512 (600-1 1/4)
CIRCLING	680-1	720-1	760-2	1000-3
	606 (700-1)	646 (700-1)	686 (700-2)	926 (1000-3)
† RONALD REAGAN WASHINGTON NATIONAL ALTIMETER SETTING MINIMUMS				
S-ILS 32	388/40 320		(400-3/4)	
S-LOC 32***	620/40	552 (600-3/4)	620-1 1/8	552 (600-1 1/8)
CIRCLING	720-1	760-1	800-2	1040-3
	646 (700-1)	686 (700-1)	726 (800-2)	966 (1000-3)



FORT BELVOIR, VIRGINIA

38°43'N-77°11'W

DAVISON AAF (KDAV)

Amtd 1 23JAN25

ILS or LOC RWY 32

NE-3, 19 MAR 2026 to 16 APR 2026

NE-3, 19 MAR 2026 to 16 APR 2026