

WAAS CH 93528 W36A	APP CRS 003°	Rwy Ldg TDZE Apt Elev	5001 343 343
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36

NACOGDOCHES A L MANGHAM JR RGNL (OCH)






RNP APCH-GPS.

▼ Baro-VNAV NA when using LFK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use LFK altimeter setting: Increase LPV DA to 598 feet; increase LNAV/VNAV DA to 680 feet; increase all MDAs 60 feet and LNAV visibility Cat C 1/8 SM, and Circling visibility Cat C 1/4 SM.



MISSED APPROACH: Climb to 2400 direct XOWNU and on track 356° to DRBOB and hold.

AWOS-3PT 135.625	HOUSTON CENTER 125.175 285.575	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

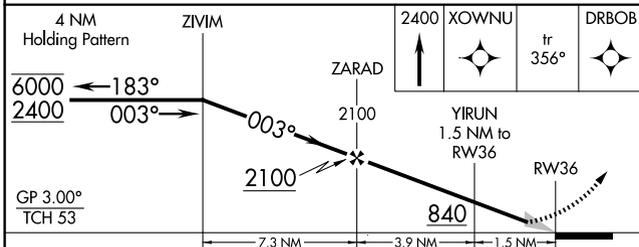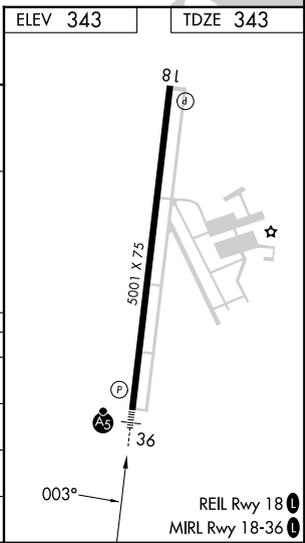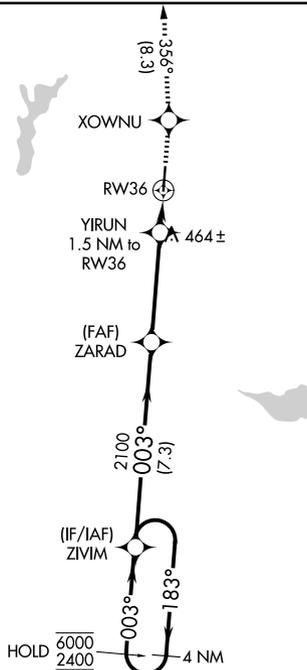

CATEGORY	A	B	C	D
LPV DA	543-1/2	200 (200-1/2)		NA
LNAV/VNAV DA	625-1/2	282 (300-1/2)		NA
LNAV MDA	720-1/2	377 (400-1/2)	720-5/8 377 (400-5/8)	NA
CIRCLING	860-1	517 (600-1)	1080-2 737 (800-2)	NA

SC-5, 19 MAR 2026 to 16 APR 2026

SC-5, 19 MAR 2026 to 16 APR 2026