

WAAS CH <b>63129</b> <b>W08A</b>	APP CRS <b>082°</b>	Rwy Ldg <b>3501</b> TDZE <b>739</b> Apt Elev <b>741</b>
--	------------------------	---

# RNAV (GPS) RWY 8

MACKINAC ISLAND (MCD)


RNP APCH.

**▼** Rwy 8 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Pellston altimeter setting and increase all MDA 60 feet, increase LP and LNAV Cat C visibility 1/8 SM and Circling Cat C visibility 1/4 SM. Straight-in and Circling Rwy 8 NA at night.


**▲**

MISSED APPROACH:  
Climb to 2500 direct HUVTI and hold.


AWOS-3P <b>118.275</b>	MINNEAPOLIS CENTER <b>134.6 354.05</b>	UNICOM <b>122.7 (CTAF)</b>	<b>122.8</b>
---------------------------	---	-------------------------------	--------------

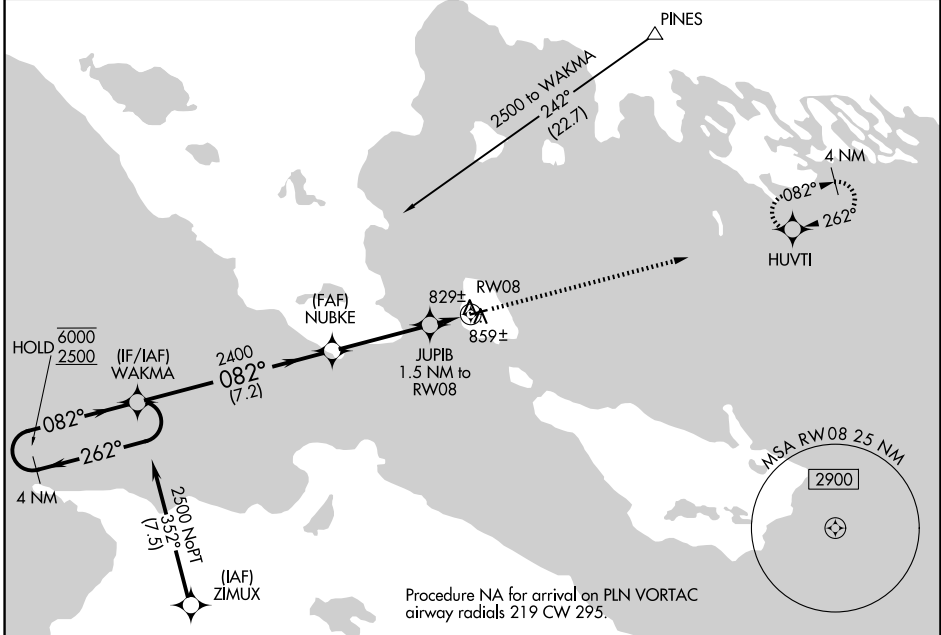

ELEV 741	TDZE 739
----------	----------

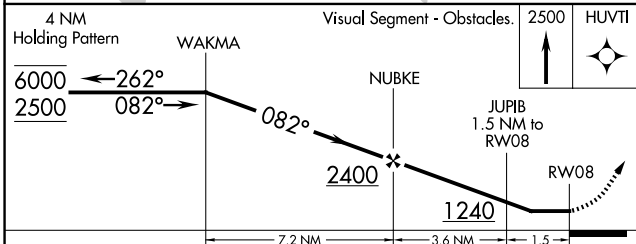

CATEGORY	A	B	C	D
LP MDA	1080-1 341 (400-1)			NA
LNAV MDA	1120-1	381 (400-1)	1120-1 1/8 381 (400-1 1/8)	NA
CIRCLING	1320-1	579 (600-1)	1320-1 1/2 579 (600-1 1/2)	NA

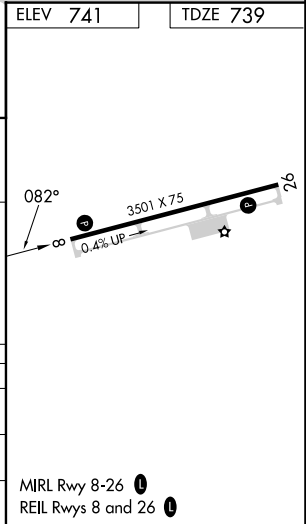

EC-1, 19 MAR 2026 to 16 APR 2026

EC-1, 19 MAR 2026 to 16 APR 2026