

WAAS CH 99725 W34A	APP CRS 335°	Rwy Ldg TDZE Apt Elev	5010 665 689
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 34

ABERNATHY FLD (GZS)

RNP APCH - GPS.


NA Baro-VNAV NA when using MDQ altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 34 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use MDQ altimeter setting: increase LPV DA to 996 feet; increase LNAV/VNAV DA to 1524 feet and all visibilities 1½ SM; increase all MDAs 100 feet and LNAV visibility Cat B ¼ SM, Cats C and D ½ SM, and Circling visibility Cats A and B ¼ SM and Cat C ½ SM.

MISSED APPROACH:
Climb to 3000 direct WOZYE and hold.



AWOS-3
118,275

MEMPHIS CENTER
125.85 379,25

UNICOM
122.8 (CTAF)

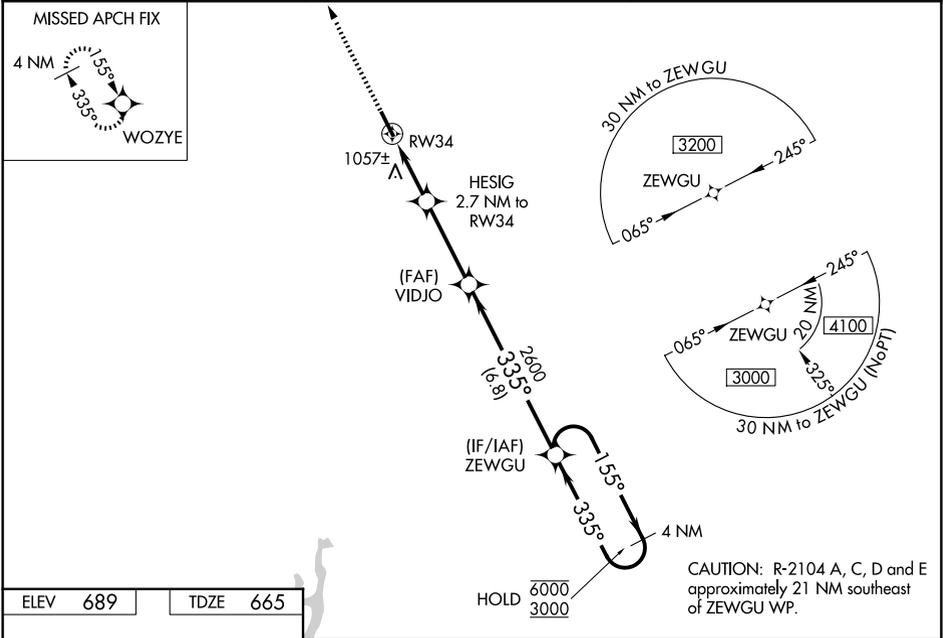

ELEV 689	TDZE 665
-----------------	-----------------

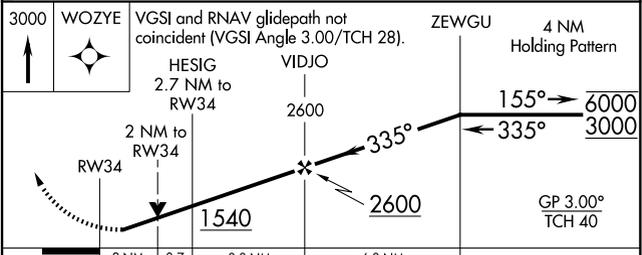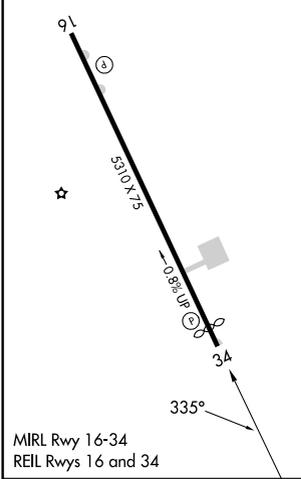

CATEGORY	A	B	C	D
LPV DA	915-1		250 (300-1)	
LNAV/VNAV DA	1443-2½		778 (800-2½)	
LNAV MDA	1320-1	655 (700-1)	1320-1⅞	655 (700-1⅞)
CIRCLING	1420-1 731 (800-1)	1480-1 791 (800-1)	1480-2¼ 791 (800-2¼)	1640-3 951 (1000-3)

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026